

(54) Title
Gaming device Identification method and apparatus

(51)⁷ International Patent Classification(s)
G06F 017/00 A63F 009/24
A63F 009/22

(21) Application No: 199954012

(22) Application Date: 1999.10.14

(30) Priority Data

(31) Number	(32) Date	(33) Country
09172787	1998.10.14	US

(43) Publication Date : 2000.04.20

(43) Publication Journal Date : 2000.04.20

(71) Applicant(s)
International Game Technology

(72) Inventor(s)
Bill Wells; James T McGlone

(74) Agent/Attorney
SPRUSON and FERGUSON, GPO Box 3898, SYDNEY NSW 2001

ABSTRACT

An electronic memory which cannot be modified or erased, such as one-time programmable or add-only (OTP/AO) memory is used for storing direct or indirect indications of characteristics of a gaming terminal or its components. Preferably, a plurality of gaming terminal boards includes memory that has one or more rows of OTP/AO memory for storing information such as memory or board serial numbers, manufacture date, processor speed or type, software or hardware version numbers, and the like. Such information is preferably used in connection with assuring the appropriateness of modifications or configurations of the gaming terminal, such as downloading software or other software modification and/or changes to hardware configuration. OTP/AO information can be used in connection with verifying identity or characteristics of software or hardware, e.g. for warranty purposes. The non-erasable and non-modifiable nature of the information provides assurance that software downloads or other modifications will not be inappropriate because of inadvertent or intentional misidentification of a component.

AUSTRALIA
PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

**Name and Address
of Applicant:**

**International Game Technology
9295 Prototype Drive
Reno Nevada 89511
UNITED STATES OF AMERICA**

Actual Inventor(s):

Bill Wells, James T. McGlone

Address for Service:

**Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia**

Invention Title:

Gaming Device Identification Method and Apparatus

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

GAMING DEVICE IDENTIFICATION METHOD AND APPARATUS

FIELD OF THE INVENTION

The present invention relates an identification method and apparatus for use in identifying components of a gaming device such as a slot machine, card game machine, keno machine and the like, and, in particular, identification for machine components using a non-erasable electronic memory or memory portion such as a memory with write-once or add-only characteristics.

BACKGROUND INFORMATION

Many current gaming machines are configured with electronic components, commonly mounted on one or more printed circuit boards (PCBs). Many such electronic components use programming or other information stored in memories. In at least one typical configuration, a gaming terminal or gaming machine will include a controller board, a communications board or module, and one or more so-called peripheral boards such as a display controller board, a currency acceptor board, a coin handler board, and the like. Typically one or more of the boards, such as, e.g., the game controller board, a processor (microprocessor) or other computer unit which often operates based on programming or other information (software or firmware) stored in a memory such as one or more electronically erasable programmable read-only memories (EEPROMS). Such software or firmware may be programmed or stored in the memory locations during the manufacturing or assembly of the gaming device. Additionally, software or firmware may be provided to replace or supplement the software or firmware in a gaming device which is in operation (in the field), e.g. to update the machine configuration (such as adding new features, new games and the like, and/or to correct programming errors). In either case, the new firmware

or software is transferred or "downloaded" from a source (which may be, e.g., a computer such as a workstation, personal computer, laptop computer, and the like) to the "target" memory in a particular gaming terminal or machine.

5 Although downloading from one computer to another is, in general, a process that is currently known, downloading software or firmware to components of gaming devices presents particular problems not readily addressed by conventional downloading techniques and apparatus.

One feature applicable to gaming device downloading is the stringent regulatory oversight and control exercised by gaming regulatory authorities in many jurisdictions. In many, and perhaps all, regulated gaming jurisdictions, downloading of software or firmware to a gaming terminal will not be permitted without some assurance that the new software or firmware will comply with local regulations. For example, a gaming regulatory authority in one jurisdiction may require assurance that downloading to, e.g., update bill acceptor software will result in a machine having bill acceptor software appropriate (and approved) for that jurisdiction (and will not, e.g., run the risk of inadvertently and/or intentionally downloading bill acceptor software that was approved in a different jurisdiction, or not at all).

20 It is also commonly found that gaming devices occur in a wide variety of configurations, such as employing numerous different types of processors, memories, game configurations, versions and types, peripheral hardware and software and the like. Additionally, owing to differences in manufacturing dates, maintenance history and the like, gaming devices are often encountered with a wide variety of different hardware and software components which may not

be apparent (or may be discernable only with difficulty) from a visual inspection of the gaming device, its components or operation. For this reason, when it is desired to download software to a particular gaming terminal, it is typically necessary to select a particular software version for downloading, bearing in mind the types of software and hardware found on the particular gaming terminal, lest the newly-downloaded software is incompatible with the gaming terminal or results in operation which is not approved by a particular jurisdiction. Additionally, it is possible that the software or firmware which is to be downloaded is, in fact, already present on a particular gaming terminal so that the download process represents a waste of time and effort.

In typical previous situations, in order to download software or firmware to a gaming terminal, characteristics of the gaming terminal and/or its components were determined manually, such as by visually inspecting the components and/or running tests of diagnostics on a component in an attempt to determine characteristics such as the version or type of a particular board, the processor speed associated with a particular board, the version of software or hardware components, and the like. Such manual determination of characteristics has, in the past, typically required a significant investment of time, especially when a relatively large number of gaming terminals are being programmed or re-programmed, and, to make matters worse, the time investment is typically made by relatively highly-trained personnel who have the background and experience required to analyze the hardware/software components that are present. Such investment of time by relatively highly-trained personnel represents a significant expense involved in downloading information which, owing at least partly to the regulatory environment found for gaming devices, was previously believed to be largely unavoidable. Furthermore, it

has been found that even relatively highly-trained personnel have a undesirably high error rate when attempting to determine characteristics needed for a download, which may lead to inoperability or improper operation of a gaming device, violation of gaming jurisdiction laws or rules and may require an additional investment of time to detect and/or correct such errors.

5 In addition to a downloading context, identification of gaming device components or component characteristics may be useful in the context of gaming device maintenance, service or warranty fulfillment. For example, when determining whether a repair of a gaming terminal is covered by a warranty, it may be necessary to determine when the gaming terminal was manufactured or when one of the components was manufactured or last repaired or revised.

Another feature of many gaming devices which affects the manner in which revisions of software or firmware (or hardware) can or should be performed is the fact that gaming devices are often configured to dispense money so that there is a potential for modifications or downloads to be intentionally performed in an unauthorized fashion in such a manner as to create unauthorized or improper payouts. This is a potential which is typically not present in many other types of downloads from one computer to another. Accordingly, it is important, not only to gaming regulatory authorities but also casinos or other game operators, to achieve a level of confidence that, not only will inadvertent (e.g. cross-jurisdictional) downloads be avoided, but there are procedures in place to avoid or prevent intentional or unauthorized downloads.

15
20 Accordingly, it would be advantageous to provide a method and apparatus for downloading by which the characteristics of a gaming terminal needed to avoid inadvertent or intentional improper downloads can be determined substantially automatically, i.e. while

reducing, or, preferably, eliminating the need for manual characteristic determination, visual inspection of machines, their components or operation and the like. It would be particularly advantageous to provide a download process which can obtain such gaming terminal or gaming terminal component characteristics entirely automatically, i.e. using only computers or other machines and without the need for any human input or effort to accomplish such determination of characteristics. It would further be advantageous to provide such a system and method which would reduce or eliminate the potential for errors in, or unauthorized tampering with, the identification system.

10 Summary of the Invention

The invention provides a method for downloading programming to a gaming terminal from a remote site, wherein said programming can appropriately be downloaded only to a gaming terminal with components having at least a first set of characteristics, the method comprising:

providing a gaming terminal having at least a first circuit board with a memory, at least a portion of which is non-erasable memory;

storing in said non-erasable memory, at least first information indicative of characteristics of said first circuit board;

transmitting said first information from said gaming terminal to said remote site; downloading said information only if said characteristics of said first circuit board match said first set of characteristics.

The invention further provides apparatus usable for downloading programming to a gaming terminal from a remote site, wherein said programming can appropriately be downloaded only to a gaming terminal with components having at least a first set of characteristics, the apparatus comprising:

at least a first circuit board in said gaming terminal having with a memory, at least a portion of which is non-erasable memory, at least first information indicative of characteristics of said first circuit board stored in said non-erasable memory

means for transmitting said first information from said gaming terminal to said remote site;

means for downloading said information only if said characteristics of said first circuit board match said first set of characteristics.

The present invention includes providing gaming terminal or gaming terminal components with information usable for characterizing gaming terminal components, which is electronically stored in a memory or portion of memory which is add-only memory (AO) or one-time programmable (OTP) memory. By storing, in such memory, information which either uniquely identifies a component or identifies characteristics of a component, it is possible to configure a download system which can automatically obtain the information needed to perform a download while achieving a level of security required to make such automatic download feasible in view of the requirements of gaming regulators and/or game operators. In one embodiment, a game controller card and a plurality of peripheral cards are each provided with certain memory locations which contain information in a fashion that such information, as a practical matter, cannot be erased or changed. Such memory locations can be used to store, e.g.,



P-215

a unique serial number or other unique identifier, hardware characteristic information such as processor type or speed, vendor identification, date of manufacture, and the like. In this way, before downloading information to a gaming terminal, it is possible to automatically (substantially without human intervention or effort) verify that the download will be proper, such as to verify that the jurisdiction for which the gaming terminal is configured (or where the casino or other purchaser is located) is the same as the jurisdiction for which the new software has been approved, to verify that the clock speed and/or data transfer speed for which the new software is designed (or at which the download is to take place) is compatible with the clock speed of the gaming terminal or its component, that the software to be downloaded is known to be compatible with other software and/or hardware on the gaming terminal that will remain in place, and the like.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and B are block diagrams depicting components of multi-terminal gaming or production systems, including components of a gaming terminal of a type which may be used in connection with the present invention;

Figs. 2A and B are block diagrams illustrating examples of memories which may be used in connection with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE
PREFERRED EMBODIMENT

Although the present invention can be used in connection with many types of gaming terminals, either as stand-alone devices or coupled in any of a number of different multi-terminal configurations, Fig. 1A depicts one example of a gaming terminal 112a coupled, along with other gaming terminals 112, via one or more local controllers 114 a,b,c to a central computer 116. In the embodiment of Fig. 1A, gaming terminal 112a (and, typically, all gaming terminals in the group) includes a game controller board 122 which will typically include, among other items, a microprocessor and a memory such as an EEPROM storing programming and/or other information for controlling operation of the controller board 122. Typically the hardware and software of the game controller board 122 will contain information or programming defining the type of game and making determinations of local win/loss outcome (as opposed to, e.g., non-local, progressive win/loss outcomes) for the gaming terminal 112a. Because of the central role of the game controller board 122 in determining game win/loss and, thus, in determining any monetary payout, it is particularly important to assure the presence of the correct software for the game controller board e.g. to avoid improper or incorrect payouts and to assure compliance with local regulatory authorities.

Although it is possible to combine numerous functions onto a given board, typically numerous boards will be provided in a gaming terminal for forming a plurality of functions. In the depicted embodiment, the game controller board communicates with a communications board 124 which provides information to and, receives information from a local controller 114a and/or

P-215

central computer 116, for purposes such as monitoring use and performance, assuring compliance, performing accounting and similar functions, and facilitating implementation of progressive or other multi-terminal based games or prizes. In one embodiment, the communications board 124 includes one or more ports by which a laptop 128 or other computer
5 may be coupled to the gaming terminal 112a for, among other purposes, downloading as described more fully below.

In the embodiment of Fig. 1A, a plurality of peripheral boards 128a-d communicate with the game controller board 122 and control various peripheral devices for performing various functions such as bill acceptor functions 132a, coin handling functions 134a, 132b, video
10 functions 132c and audio output functions 132d. In many configurations, some or all of the peripheral and other boards 128a-d, 124 will contain memories, such as flash memory, EEPROMs or other devices for storing software or firmware controlling their functions (such as
15 by containing software or firmware for running on microprocessors or other computing devices on such boards). In the strict regulatory environment for many gaming devices, it is typically necessary to provide assurance that only approved and proper software is used in the peripheral and other boards, (in addition to that provided on the game controller board).

In typical previous devices, the boards provided in a gaming terminal are secured from casual or unauthorized inspection or access such as by being housed in a normally-locked cabinet portion of the gaming terminal. Thus, in previous systems when it was desired (as described
20 above) to (manually) verify the type or characteristics of boards on a gaming terminal (e.g. prior to a download or other updating purpose or for warranty or service purposes) it was typically

P-215

necessary for a relatively highly trained worker to inactivate a gaming terminal, unlock the cabinet portion, and physically inspect (often involving removal of) one or more of the boards 122-128 of a gaming terminal 112a. Depending on the nature of the work to be performed, the skilled personnel may need to rely on experience and knowledge to recognize and distinguish
5 different boards based on their appearance and/or notations, markings or indicia provided on boards and/or perform tests or diagnostics on the board to obtain the necessary information regarding characteristics of the board and/or its identity or history.

Fig 1B depicts a system usable in subassembly or final assembly downloading, e.g., in a gaming terminal manufacturing environment. Fig. 1B includes a plurality of computers such as workstation computers, network server computers, and/or PC-type computers coupled by
10 network lines such as fiber optic lines 152 in a manner well-known to those of skill in computer network technologies.

At various stages in employing the system of Fig. 1B, programming data or other
15 information is stored in a number of different storage systems such as data bases (typically providing storage on hard drives or other well-known storage media). In the depicted embodiment, information, during program design process, is held in an engineering database 154. And software and firmware engineers use and modify such information via computers 156, 158 having at least indirect access to engineering database 154. Preferably, programs or other data which are still in the development phase are restricted to the engineering database 154 and
20 are not stored in other databases. At some point, engineering will release the program or other information to product assurance 162 which, after review, will submit the programming or data

(e.g. via writing on a CD 164 to a gaming jurisdiction for approval. After the program or data is approved by the gaming jurisdiction, the program is copied to a production download server 166 and, preferably, stored in a released database 168. Information about the approved program is provided to a customer order system 172 and other systems such as engineering 174a and product assurance 174b. Although released programs may be provided in various forms such as on CD ROM 176 via a CD duplicator 176b, Fig. 1B also illustrates a system for downloading programming data or other information as part of a gaming terminal assembly or fabrication system. The programming or data may be loaded onto boards or other subassemblies 178, e.g. via a translator/power assembly 182 and download terminal 184 or may be loaded into one or more gaming terminals 186a,b, e.g. via connection to a communication board for downloading, in turn, to target peripheral devices or other subassemblies within the gaming terminals 186a, 186b, e.g. via a download terminal 188.

As with downloading in the field, as depicted in Fig. 1A, downloading on the fabrication or assembly line, as depicted in Fig. 1B in the strict regulatory environment for many gaming devices, it is typically necessary to provide assurance that only approved and proper software and data is used in the gaming terminals, including peripheral and other boards (in addition to that provided on, e.g., the game controller board). Depending on the nature of the download, it will be advantageous, in performing assembly line downloading, to recognize or distinguish different boards, e.g. to obtain information regarding characteristics of the Board and/or its identity or history.

According to an embodiment of the invention, automation of the step of obtaining gaming terminal component characteristics is enabled or facilitated by including, on one or more of the gaming terminal boards or other components, an electronic memory device, e.g., of the type depicted in block diagram fashion, in Figs. 2A or 2B.

5 In the embodiment of Fig. 2A, a memory device such as an EEPROM 212 is provided with a plurality of memory locations 214 which are preferably of a type which may be programmed or written-to many times. The memory device 212 is also provided with at least some memory locations 216 (such as a one or more rows of memory) which are configured such that they cannot be erased or changed after they have been written to or programmed. In the embodiment of Fig. 2A, the memory locations 216 are write-once or one time programmable (OTP) memory, meaning that after any of the program locations in the memory region 216 have been written to or programmed, subsequently none of the memory locations in the memory region 216 can be changed or erased. One example of this type of memory is that sold under Model No. M34R32 available from S.G.S. Thomson. This device provides 4096 bytes of EEPROM space 214 with an additional 32-byte OTP row 216.

Fig. 2B depicts a type of memory having a plurality of programmable memory locations 214 and a region of memory 218 (such as a row of memory) which is add-only (AO) memory. In add-only memory, it is possible to write to or program some of a plurality of memory locations 222a-222f, without writing to others. In the add-only row 218, after any memory location or group of locations 222 have been written to or programmed, those same memory locations cannot, thereafter, be changed or erased. However, memory locations in the row 218 which have

P-215

not been previously written to or programmed can be, later, written to or programmed (once) even after a process of writing to or programming other memory locations in the same region or row 218. For example, in add-only memory, it is possible to program, e.g., a first memory location 222a at a first time such that the first memory location 222a cannot thereafter be changed or erased after said first time, but to still permit programming or writing to, e.g. a second (previously unprogrammed) memory location 222b at a second time, after said first time, such that the second memory location 222b cannot be changed or erased after the second time. In this way, as long as there remain memory locations in the add-only region 218 which have not previously been programmed or written to, it is possible to add further information to the add-only region 218. However, although it is possible to add information to the region 218 (as long as unprogrammed space remains) it is never possible to erase or change information once it has been written to the add-only region 218. One example of add-only memory is available from Dallas Semiconductor.

According to an embodiment of the invention, OTP or add-only (OTP/AO) memory is provided in each gaming terminal, preferably on at least one board of each gaming terminal (such as the game controller board) and, typically, on one or more peripheral boards 128a-128d or other boards or components. It is possible to provide for systems in which some gaming terminals 112a are provided with OTP/AO memory while others e.g. 112c are not (e.g. when, in the context of a networked casino system, some gaming terminals have been upgraded or replaced while others have not).

There are three major procedures or steps in connection with using such OTP/AO memory in embodiments of the present invention: storing the desired information onto the OTP/AO memory, reading or retrieving the information stored in the OTP/AO region, and using such retrieved information, e.g. for secure downloading. These processes involve communicating information between the OTP/AO memory and an external (to the gaming terminal) device (typically one or more computers 116,128). Although it would be possible to configure a system in which a gaming terminal contains only a single OTP/AO memory device which stores information relative to a plurality of different hardware components (such as identifying two or more different boards 122a-128d) it is preferred to provide a separate OTP/AO device on each separate board. In this way, changes to hardware (or, in some configurations, software) can be recorded directly on the changed component so that when components are physically removed (such as "swapping in" a new board) and/or modified (such as by changing jumper connections on a board) information relating to the identity and/or configuration of that board, stored on the on-board OTP/AO memory, will "travel with" the board.

Although it would be possible to configure a gaming terminal so that two or more boards (such as each board having an OTP/AO memory) were provided with a port or other connection specific to that board, to facilitate reading the OTP/AO memory of that board, preferably, the gaming terminal is provided with one or more system ports 126 or similar communication connections 127 through which it is possible to obtain or transmit information relating to any of a plurality of OTP/AO memories in the gaming terminal (e.g. via gaming terminal buses or other internal communication links 130 a-f). The ports 126,127 may be provided on any of a number

P-215

of gaming terminal components including the game controller board 122, but are preferably included in a separate communications board 124.

The information stored on the OTP/AO memory may indicate characteristics of the board's (or other component's) hardware or software either directly or indirectly. The information may indicate characteristics directly by, e.g., storing information in either coded or human readable (e.g. ASCII character form) which identifies such characteristics such as storing board or download clock speed, board processor type and the like. An example of information which indirectly indicates hardware or software characteristics of the board or component includes storage of an EEPROM serial number (which, e.g., may be used as an index into an off-board database which stores characteristics corresponding to such serial number). It is possible to store both direct and indirect indicators of characteristics on an OTP/AO memory. It is also possible to store information which has both indirect and direct uses. For example, storing a date of manufacture on an OTP/AO memory may be used as all or part of an index into a database to determine other board characteristics and/or may be used directly, where the date of manufacture is itself a relevant characteristic (such as for warranty or repair purposes).

Information may be stored into OTP/AO memory in a number of fashions. In one embodiment, some or all of the information stored in the OTP/AO memory is stored at the time of memory manufacture, by the memory fabricator. Examples of information that may be stored in this fashion include memory serial (or other preferably unique) numbers and/or date of manufacture. Some or all information stored in an OTP/AO memory may be stored at the time of board manufacture (rather than memory manufacture) and/or may be stored at the time

P-215

software is initially downloaded or programmed into a gaming terminal (or components thereof). Examples of information that might be stored in this fashion include board (rather than memory) serial number or version numbers, clock speed, processor type, software indicators or version numbers, date of assembly (board assembly or gaming terminal assembly) and/or an indicator of (initial) gaming regulatory jurisdiction (e.g. to distinguish a board intended for a first country or state from that intended for use in a second country or state).

Some or all of the information stored on OTP/AO memory may be stored at the time a gaming terminal is sold to, shipped to or received at a particular customer location or gaming jurisdiction. Some or all information stored in the AO memory may be stored when a gaming terminal component is revised, repaired, updated, reconfigured or the like (including both software and hardware revisions). Preferably, the information stored in OTP/AO memory includes information that can be used for error or data integrity checks such as cyclic redundancy check (CRC) information, one or more parity bits or the like. In the case of write-only or one-time programmable memory, the error/data integrity check information is written when the memory is initially programmed. In the case of add-on memory, error checking or data integrity information may be stored (in a previously unprogrammed AO memory location) each time additional information is stored in the add-on memory. The provision of error checking or data integrity information is particularly useful or necessary in providing the capability of downloading to gaming terminals (e.g. in order to provide the desirable or required confidence that inadvertent or intentional changes are not made to a gaming terminal in such a fashion as to result in gaming terminal operation which is out of compliance with local gaming regulations).

P-215

For example, in the absence of an error or data integrity check, it might be possible that a memory read error would permit downloading of a program configured for a first jurisdiction, into a machine located in a second jurisdiction (e.g. because, the laptop 128 or other source of download programming selected the "wrong" program for downloading based on incorrect information). It is believed that providing error or data integrity check information in OTP/AO memory will assist in preventing, or at least reducing the likelihood of, this type of improper download.

Table I provides one example of a set of information that may be stored in OTP/AO memory according to one embodiment of the invention. In one embodiment, data stored in the OTP row and/or in the ROM are stored in little endian format. In the example of Table I, items indicated having a potential use of "revision control" are, in at least one embodiment, used during download operations. Preferably the EEPROM serial number is a number which is unique for each EEPROM (at least for a given vendor and purchaser). The communications ID, may be, e.g. used by the board firmware for providing communication to a host computer. The platform and target information may be used in connection with, e.g., host to terminal download communications. The vendor ID may be a code used for identifying the vendor of the EEPROM. The clock speed may be used in connection with allowing the peripheral board firmware to communicate with a host computer. Preferably the CRC is used by the board firmware to validate the OTP data before its use.

In addition to the data defined in the OTP row, according to one embodiment, the first 20 bytes as of the EEPROM normal memory space will be used for storing, e.g., printed circuit

board serial number information of the peripheral board, e.g., stored in ASCII format.

Preferably, two bytes of CRC information is also provided. To protect this information from corruption, preferably the first sixty-four bytes of the EEPROM space is configured as read only memory (ROM).

Table I
OTP Row Memory Allocation

Starting Address (hexa-decimal)	Bytes	Format	Description	Potential Uses
0x00	4	Binary	EEPROM serial number	Revision Control
0x04	1	Binary	Communications ID	Used at Powerup for Intra-Game Communications
0x05	7	ASCII	Date of manufacture	Warranty/Service/Revision Control
0x0C	2	Binary	Platform and target	Intended Use
0x0E	8	ASCII	Vendor ID	Warranty/QC/Service
0x16	1	Binary	Clock Speed	Used at Powerup for Intra-Game Communication
0x17	1	Binary	Processor Type	Used at Powerup for Intra-Game Communication
0x18	6		Reserved for future use	
0x1E	2	Binary	2-byte CCITT CRC	Error/Data Integrity Check

Although it is contemplated that the gaming terminal component characteristic information stored or indicated in the OTP/AO memory will be particularly useful in connection with download of information, (as described more fully below). It is also believed that the

P-215

information may be useful in other contexts. Examples of other uses for OTP/AO information according to embodiments of the present invention, include providing the ability of gaming regulators to verify (e.g. on a random basis or for specific regulatory purposes) that a gaming terminal is configured properly for a particular jurisdiction, allowing personnel responsible for maintaining, repairing or updating gaming terminals to verify that a particular gaming terminal includes particular components, uploading information regarding gaming terminal components e.g. as part of a trouble report, inventory or tracking procedure, verifying characteristics, such as manufacture or sale date, of a gaming terminal or components thereof in connection with making decisions on warranty coverage, and the like.

Regardless of the purpose for reading information stored on an OTP/AO memory in a gaming terminal, the reading procedure will, at least in one embodiment, include sending a read command e.g. from a laptop 128 or central computer 116 via a port 126,127 to a communications board 124, (with the command typically either specifying that all OTP/AO memories should be read or specifying which board or OTP/AO board memory should be queried) and sending a read command (e.g. over a control line or a portion of communication bus 130) which contains or indicates read addresses for one or more OTP/AO memory portions. The commands may be configured to retrieve selected (addressed) portions or fields of the OTP/AO memory or may be configured to return the entire OTP/AO contents (e.g. a OTP/AO "row" of memory). In one embodiment, it is preferred to always return the entire contents of OTP/AO memory (particularly in the case of add-on memory) e.g. to help ensure that there has been no intentional or inadvertent storage of incorrect or misleading information in OTP/AO memory. For example, if

5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

a new (previously unprogrammed) field of an add-on memory has been programmed to reflect a new jurisdiction (i.e. a jurisdiction different from the original gaming regulatory jurisdiction programmed in the AO memory) reading the entire row would alert the download software that there has been a change in jurisdiction (and, if desired, prompt a check of the database to verify that this change in jurisdiction was correct and/or authorized), whereas reading only the newest or most recent fields of AO memory could result in downloading an unauthorized program (e.g. a program authorized only for a different jurisdiction). Thus, in a procedure where only the most recently programmed fields are read, there might be no indicator that the jurisdiction information may have been tampered with or inadvertently modified.

Hardware or software characterizing information read from the OTP/AO memory can be used in a number of fashions. In one embodiment, the information is used in downloading software to a gaming terminal (or components thereof). Procedures for downloading can be similar to those described e.g., in U.S. patent application number ___, attorney file no. 3735-923 titled "Method for downloading data to gaming devices" filed on the even date herewith, and/or Serial No. _____ (attorney file number 3735-905-CON), filed June 1, 1998 which is a continuation of Serial No. 08/600,311 (attorney file number 27224-90500) for "Peripheral Device Download Method and Apparatus" filed February 12, 1996, all incorporated herein by reference.

The present invention can be used in connection with a process that involves loading information, received from an external device (such as a central computer) by a computing device (such as the microprocessor on the controller board) to a target which may be a gaming

P-215

terminal component, including one or more peripheral devices. In this way it is unnecessary to have separate ports on each board for direct access to the peripheral devices (or other gaming terminal components) or related memories, thus making the process of updating the programming for peripheral devices or other gaming terminal components less time-intensive and less labor-intensive. In one embodiment, an updated or modified program is received in the gaming terminal from an external device (such as a hand-held or portable device or a central computer coupled via a communications link) and is downloaded or passed-through from the controller board to one or more coupled peripheral devices. Preferably, the programming information is downloaded in such a way as to reduce or minimize the amount of down time or inconvenience to players. In one embodiment, when the new program is downloaded from a central computer to each gaming terminal, the method avoids disabling all gaming terminals at the same time, such as by waiting until the gaming terminal is idle for a predetermined period before downloading or by cycling through various gaming terminals or groups of gaming terminals so that a relatively small number of the gaming terminals are disabled (for reprogramming) at any one time. When reprogramming of two or more peripherals attached to a given gaming terminal is desired, in one embodiment the new programming information for each device to be reprogrammed is downloaded to the gaming terminal and the gaming terminal begins downloading the information to the attached peripherals preferably only after all information has been downloaded to the terminal. In this way, only a single session of downloading to the gaming terminal is needed in order to provide eventual updating of two or more coupled peripherals or other components. In situations in which security is a concern, such

P-215

as systems in which money handling occurs (e.g., gaming terminals, lottery terminals, and the like), it may be useful for the information to be encrypted when it is transferred to the computing device and is decrypted preferably in the gaming terminal. In one embodiment, the invention includes providing at least a first memory in a gaming terminal as a programmable memory; transmitting first information from an external source to the gaming device; transmitting the first information for receipt by said peripheral device; storing the first information in the first memory; and using the first information during operation of the peripheral device. Preferably such a method includes identification of the gaming terminal hardware or software, preferably using one or more memory devices which have identifying and/or characteristic-indicating information stored in non-erasable, non-modifiable memory, such as OTP/AO memory.

Downloading can be performed locally (e.g. by connection of a laptop 128 or other computer to the communications board 124 of a gaming terminal 112a or remotely from a local controller 114a or central computer 116. Preferably the downloading includes verifying the propriety of the software to be downloaded and/or verifying or adjusting download procedures (data transfer rate, error detection/correction procedures and the like) so that the download will result in a gaming terminal that is appropriately configured and operates as desired. Preferably, it is the source computer 128, 116 which performs such verifying. It is noted, however, that while such source-based checking will assist in eliminating or reducing the occurrence of, e.g. inadvertently inappropriate downloads, it might be possible to configure a laptop 128 to purposely download incorrect or inappropriate software. Accordingly, it would also be possible to configure the destination (the gaming terminal) in such a way that it will actively block or

prevent downloading of software unless the software to be downloaded is identified by the destination (gaming terminal) as appropriate (based, at least in part, on information stored in OTP/AO memory). In this way, if an attempt was made to download a version of gaming software which, e.g., did not include a properly encrypted password for authenticating that the proposed download software has been approved by the appropriate gaming regulatory authorities, the gaming terminal 112a would, preferably, block or prevent the downloading of such software.

Another example of a use of information read from OTP/AO memory in a gaming terminal is to verify warranty coverage for servicing or repair of a gaming terminal. For example, if a particular gaming terminal was covered by a one-year warranty, it would be possible to configure the system such that a service person could determine the date of sale or delivery of a gaming terminal (or a component thereof), either directly or indirectly, based on information read from OTP/AO memory. As noted above, particularly in the case of AO memory, it is useful to configure a system to always read the entire memory row, e.g. to avoid a situation in which a new AO memory field is written with an incorrect sale date indicator (either inadvertently or intentionally).

Another situation in which information stored in OTP/AO memory may be used includes the manufacturing process and in particular the management of software downloading as part of a gaming terminal manufacturing process. An example of a use of component identification in connection with such management is described, e.g., U.S. patent application no. _____ (attorney file no. 3735-925) titled "Program Management for Downloadable Devices", filed on even date

P-215

herewith and incorporated herein by reference. Briefly, information stored in OTP/AO memory can be used in a number of such management procedures including verifying that the hardware present in a particular gaming terminal or component is compatible with a particular download procedure (e.g. a download bit rate or error detection/correction procedure) and/or that the software is compatible with or appropriate for the hardware (or other software) present in the gaming terminal or component (e.g. the software is compatible with the particular microprocessor present in the gaming terminal or component). Furthermore, information in OTP/AO memory may be used at the completion of the gaming terminal assembly (and/or intermediate assembly stages) to verify that the various components of the gaming terminal are compatible with one another (e.g., the gaming terminal does not have a bill acceptor appropriate for a first jurisdiction and a coin handler board appropriate for a second (different) jurisdiction) and/or the components and software in the gaming terminal are configured as desired (e.g. are approved for the gaming jurisdiction for which the gaming terminal is being built), includes the correct game software (e.g. does not download a poker game software when the terminal was intended to be a slot machine) and has the correct (typically most recent) version of software appropriate for the configuration of the gaming terminal. Additionally, information read from OTP/AO memory may be used in the management procedures to store appropriate information in a database. As noted above, in some configurations, a database is used to provide information about a gaming terminal, its configuration, components or history with such information being indexed, in the database, by information obtained from OTP/AO memory (e.g. a memory serial number or similar identifier number). Accordingly, as a gaming terminal is assembled, it is

P-215

preferred, in at least this configuration, to read information from OTP/AO memory of the gaming terminal and its components, and store such information in a database, preferably in a fashion to achieve the desired database indexing or similar function.

In light of the above description, a number of advantages of the present invention can be seen. The present invention provides a way to identify a gaming terminal or its components in such a fashion as to substantially guard against inadvertent or intentional alterations (e.g. so as to increase the likelihood that gaming regulatory authorities will approve certain manufacture, assembly, repair and/or download procedures, particularly those which are at least partially automated and/or remote) by providing automatically accessible identification or characteristic information as part of the physical structure of the gaming terminal or component (e.g. as part of a memory mounted on a gaming terminal board). Preferably, the information travels with the gaming terminal or component and thus is automatically present and correct regardless of any changes (such as replacement of one or more boards of a gaming terminal). Because the information can be electronically programmed or stored (once only), the particular information which is provided or stored can be tailored to accommodate the contemplated use of the information (e.g. different manufacturers and/or different models or model lines of a given manufacturer may involve storing different information and/or storage in different formats). Because the stored information is provided electronically (rather than, e.g., provided as information printed or written on a circuit board) the likelihood of inadvertent or intentional modification of such information is lessened.

A number of variations and modifications of the invention can also be used. In general, it is possible to use some aspects of the invention without using others. For example, it is possible to provide non-erasable and non-modifiable information in connection with downloading software without providing information usable for or used with warranty verification. It is possible to store information in an encrypted or otherwise modified form. In one embodiment, some or all of the information which is used (e.g. in connection with downloading warranty verification and the like) and/or output from the device is stored in other memory or memory portions, such as normal EEPROM memory 214, e.g. with OTP/AO memory being used only for permitting access and/or verifying such memory (e.g. by providing an encryption key/decryption key, data integrity check information or the like). Although the non-erasable/modifiable memory is disclosed as being a portion of, or coupled to, normal EEPROM memory, it may be provided as a separate component or may be coupled to other types of memory. Although examples are provided in which a single row of OTP/AO memory is provided, more or fewer OTP/AO memory locations may be used.

In one embodiment, the gaming terminal is configured such that if an attempt is made to download certain types of improper software, the gaming terminal will be placed in an inoperative mode and/or notification of the attempt will be output e.g. to a local controller 114 or a central computer 116. Although, as noted, above, there are advantages to providing storage of characteristic-indicating information in electronic form, in one embodiment, information relating to characteristics (e.g. serial number, manufacture date or the like) may be stored or presented in optical (e.g. machine readable, bar code, or human readable form) e.g. on one or more of the

gaming terminal boards. In this case, it may be useful to include a step which involves comparing the optical characteristic indicator with electronically-stored characteristic indicators.

The present invention, in various embodiments, includes components, methods, processes, systems and/or apparatus substantially as depicted and described herein, including various embodiments, subcombinations, and subsets thereof. The present invention, in various
 5
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55
 60
 65
 70
 75
 80
 85
 90
 95
 100
 105
 110
 115
 120
 125
 130
 135
 140
 145
 150
 155
 160
 165
 170
 175
 180
 185
 190
 195
 200
 205
 210
 215
 220
 225
 230
 235
 240
 245
 250
 255
 260
 265
 270
 275
 280
 285
 290
 295
 300
 305
 310
 315
 320
 325
 330
 335
 340
 345
 350
 355
 360
 365
 370
 375
 380
 385
 390
 395
 400
 405
 410
 415
 420
 425
 430
 435
 440
 445
 450
 455
 460
 465
 470
 475
 480
 485
 490
 495
 500
 505
 510
 515
 520
 525
 530
 535
 540
 545
 550
 555
 560
 565
 570
 575
 580
 585
 590
 595
 600
 605
 610
 615
 620
 625
 630
 635
 640
 645
 650
 655
 660
 665
 670
 675
 680
 685
 690
 695
 700
 705
 710
 715
 720
 725
 730
 735
 740
 745
 750
 755
 760
 765
 770
 775
 780
 785
 790
 795
 800
 805
 810
 815
 820
 825
 830
 835
 840
 845
 850
 855
 860
 865
 870
 875
 880
 885
 890
 895
 900
 905
 910
 915
 920
 925
 930
 935
 940
 945
 950
 955
 960
 965
 970
 975
 980
 985
 990
 995
 1000
 1005
 1010
 1015
 1020
 1025
 1030
 1035
 1040
 1045
 1050
 1055
 1060
 1065
 1070
 1075
 1080
 1085
 1090
 1095
 1100
 1105
 1110
 1115
 1120
 1125
 1130
 1135
 1140
 1145
 1150
 1155
 1160
 1165
 1170
 1175
 1180
 1185
 1190
 1195
 1200
 1205
 1210
 1215
 1220
 1225
 1230
 1235
 1240
 1245
 1250
 1255
 1260
 1265
 1270
 1275
 1280
 1285
 1290
 1295
 1300
 1305
 1310
 1315
 1320
 1325
 1330
 1335
 1340
 1345
 1350
 1355
 1360
 1365
 1370
 1375
 1380
 1385
 1390
 1395
 1400
 1405
 1410
 1415
 1420
 1425
 1430
 1435
 1440
 1445
 1450
 1455
 1460
 1465
 1470
 1475
 1480
 1485
 1490
 1495
 1500
 1505
 1510
 1515
 1520
 1525
 1530
 1535
 1540
 1545
 1550
 1555
 1560
 1565
 1570
 1575
 1580
 1585
 1590
 1595
 1600
 1605
 1610
 1615
 1620
 1625
 1630
 1635
 1640
 1645
 1650
 1655
 1660
 1665
 1670
 1675
 1680
 1685
 1690
 1695
 1700
 1705
 1710
 1715
 1720
 1725
 1730
 1735
 1740
 1745
 1750
 1755
 1760
 1765
 1770
 1775
 1780
 1785
 1790
 1795
 1800
 1805
 1810
 1815
 1820
 1825
 1830
 1835
 1840
 1845
 1850
 1855
 1860
 1865
 1870
 1875
 1880
 1885
 1890
 1895
 1900
 1905
 1910
 1915
 1920
 1925
 1930
 1935
 1940
 1945
 1950
 1955
 1960
 1965
 1970
 1975
 1980
 1985
 1990
 1995
 2000
 2005
 2010
 2015
 2020
 2025
 2030
 2035
 2040
 2045
 2050
 2055
 2060
 2065
 2070
 2075
 2080
 2085
 2090
 2095
 2100
 2105
 2110
 2115
 2120
 2125
 2130
 2135
 2140
 2145
 2150
 2155
 2160
 2165
 2170
 2175
 2180
 2185
 2190
 2195
 2200
 2205
 2210
 2215
 2220
 2225
 2230
 2235
 2240
 2245
 2250
 2255
 2260
 2265
 2270
 2275
 2280
 2285
 2290
 2295
 2300
 2305
 2310
 2315
 2320
 2325
 2330
 2335
 2340
 2345
 2350
 2355
 2360
 2365
 2370
 2375
 2380
 2385
 2390
 2395
 2400
 2405
 2410
 2415
 2420
 2425
 2430
 2435
 2440
 2445
 2450
 2455
 2460
 2465
 2470
 2475
 2480
 2485
 2490
 2495
 2500
 2505
 2510
 2515
 2520
 2525
 2530
 2535
 2540
 2545
 2550
 2555
 2560
 2565
 2570
 2575
 2580
 2585
 2590
 2595
 2600
 2605
 2610
 2615
 2620
 2625
 2630
 2635
 2640
 2645
 2650
 2655
 2660
 2665
 2670
 2675
 2680
 2685
 2690
 2695
 2700
 2705
 2710
 2715
 2720
 2725
 2730
 2735
 2740
 2745
 2750
 2755
 2760
 2765
 2770
 2775
 2780
 2785
 2790
 2795
 2800
 2805
 2810
 2815
 2820
 2825
 2830
 2835
 2840
 2845
 2850
 2855
 2860
 2865
 2870
 2875
 2880
 2885
 2890
 2895
 2900
 2905
 2910
 2915
 2920
 2925
 2930
 2935
 2940
 2945
 2950
 2955
 2960
 2965
 2970
 2975
 2980
 2985
 2990
 2995
 3000
 3005
 3010
 3015
 3020
 3025
 3030
 3035
 3040
 3045
 3050
 3055
 3060
 3065
 3070
 3075
 3080
 3085
 3090
 3095
 3100
 3105
 3110
 3115
 3120
 3125
 3130
 3135
 3140
 3145
 3150
 3155
 3160
 3165
 3170
 3175
 3180
 3185
 3190
 3195
 3200
 3205
 3210
 3215
 3220
 3225
 3230
 3235
 3240
 3245
 3250
 3255
 3260
 3265
 3270
 3275
 3280
 3285
 3290
 3295
 3300
 3305
 3310
 3315
 3320
 3325
 3330
 3335
 3340
 3345
 3350
 3355
 3360
 3365
 3370
 3375
 3380
 3385
 3390
 3395
 3400
 3405
 3410
 3415
 3420
 3425
 3430
 3435
 3440
 3445
 3450
 3455
 3460
 3465
 3470
 3475
 3480
 3485
 3490
 3495
 3500
 3505
 3510
 3515
 3520
 3525
 3530
 3535
 3540
 3545
 3550
 3555
 3560
 3565
 3570
 3575
 3580
 3585
 3590
 3595
 3600
 3605
 3610
 3615
 3620
 3625
 3630
 3635
 3640
 3645
 3650
 3655
 3660
 3665
 3670
 3675
 3680
 3685
 3690
 3695
 3700
 3705
 3710
 3715
 3720
 3725
 3730
 3735
 3740
 3745
 3750
 3755
 3760
 3765
 3770
 3775
 3780
 3785
 3790
 3795
 3800
 3805
 3810
 3815
 3820
 3825
 3830
 3835
 3840
 3845
 3850
 3855
 3860
 3865
 3870
 3875
 3880
 3885
 3890
 3895
 3900
 3905
 3910
 3915
 3920
 3925
 3930
 3935
 3940
 3945
 3950
 3955
 3960
 3965
 3970
 3975
 3980
 3985
 3990
 3995
 4000
 4005
 4010
 4015
 4020
 4025
 4030
 4035
 4040
 4045
 4050
 4055
 4060
 4065
 4070
 4075
 4080
 4085
 4090
 4095
 4100
 4105
 4110
 4115
 4120
 4125
 4130
 4135
 4140
 4145
 4150
 4155
 4160
 4165
 4170
 4175
 4180
 4185
 4190
 4195
 4200
 4205
 4210
 4215
 4220
 4225
 4230
 4235
 4240
 4245
 4250
 4255
 4260
 4265
 4270
 4275
 4280
 4285
 4290
 4295
 4300
 4305
 4310
 4315
 4320
 4325
 4330
 4335
 4340
 4345
 4350
 4355
 4360
 4365
 4370
 4375
 4380
 4385
 4390
 4395
 4400
 4405
 4410
 4415
 4420
 4425
 4430
 4435
 4440
 4445
 4450
 4455
 4460
 4465
 4470
 4475
 4480
 4485
 4490
 4495
 4500
 4505
 4510
 4515
 4520
 4525
 4530
 4535
 4540
 4545
 4550
 4555
 4560
 4565
 4570
 4575
 4580
 4585
 4590
 4595
 4600
 4605
 4610
 4615
 4620
 4625
 4630
 4635
 4640
 4645
 4650
 4655
 4660
 4665
 4670
 4675
 4680
 4685
 4690
 4695
 4700
 4705
 4710
 4715
 4720
 4725
 4730
 4735
 4740
 4745
 4750
 4755
 4760
 4765
 4770
 4775
 4780
 4785
 4790
 4795
 4800
 4805
 4810
 4815
 4820
 4825
 4830
 4835
 4840
 4845
 4850
 4855
 4860
 4865
 4870
 4875
 4880
 4885
 4890
 4895
 4900
 4905
 4910
 4915
 4920
 4925
 4930
 4935
 4940
 4945
 4950
 4955
 4960
 4965
 4970
 4975
 4980
 4985
 4990
 4995
 5000
 5005
 5010
 5015
 5020
 5025
 5030
 5035
 5040
 5045
 5050
 5055
 5060
 5065
 5070
 5075
 5080
 5085
 5090
 5095
 5100
 5105
 5110
 5115
 5120
 5125
 5130
 5135
 5140
 5145
 5150
 5155
 5160
 5165
 5170
 5175
 5180
 5185
 5190
 5195
 5200
 5205
 5210
 5215
 5220
 5225
 5230
 5235
 5240
 5245
 5250
 5255
 5260
 5265
 5270
 5275
 5280
 5285
 5290
 5295
 5300
 5305
 5310
 5315
 5320
 5325
 5330
 5335
 5340
 5345
 5350
 5355
 5360
 5365
 5370
 5375
 5380
 5385
 5390
 5395
 5400
 5405
 5410
 5415
 5420
 5425
 5430
 5435
 5440
 5445
 5450
 5455
 5460
 5465
 5470
 5475
 5480
 5485
 5490
 5495
 5500
 5505
 5510
 5515
 5520
 5525
 5530
 5535
 5540
 5545
 5550
 5555
 5560
 5565
 5570
 5575
 5580
 5585
 5590
 5595
 5600
 5605
 5610
 5615
 5620
 5625
 5630
 5635
 5640
 5645
 5650
 5655
 5660
 5665
 5670
 5675
 5680
 5685
 5690
 5695
 5700
 5705
 5710
 5715
 5720
 5725
 5730
 5735
 5740
 5745
 5750
 5755
 5760
 5765
 5770
 5775
 5780
 5785
 5790
 5795
 5800
 5805
 5810
 5815
 5820
 5825
 5830
 5835
 5840
 5845
 5850
 5855
 5860
 5865
 5870
 5875
 5880
 5885
 5890
 5895
 5900
 5905
 5910
 5915
 5920
 5925
 5930
 5935
 5940
 5945
 5950
 5955
 5960
 5965
 5970
 5975
 5980
 5985
 5990
 5995
 6000
 6005
 6010
 6015
 6020
 6025
 6030
 6035
 6040
 6045
 6050
 6055
 6060
 6065
 6070
 6075
 6080
 6085
 6090
 6095
 6100
 6105
 6110
 6115
 6120
 6125
 6130
 6135
 6140
 6145
 6150
 6155
 6160
 6165
 6170
 6175
 6180
 6185
 6190
 6195
 6200
 6205
 6210
 6215
 6220
 6225
 6230
 6235
 6240
 6245
 6250
 6255
 6260
 6265
 6270
 6275
 6280
 6285
 6290
 6295
 6300
 6305
 6310
 6315
 6320
 6325
 6330
 6335
 6340
 6345
 6350
 6355
 6360
 6365
 6370
 6375
 6380
 6385
 6390
 6395
 6400
 6405
 6410
 6415
 6420
 6425
 6430
 6435
 6440
 6445
 6450
 6455
 6460
 6465
 6470
 6475
 6480
 6485
 6490
 6495
 6500
 6505
 6510
 6515
 6520
 6525
 6530
 6535
 6540
 6545
 6550
 6555
 6560
 6565
 6570
 6575
 6580
 6585
 6590
 6595
 6600
 6605
 6610
 6615
 6620
 6625
 6630
 6635
 6640
 6645
 6650
 6655
 6660
 6665
 6670
 6675
 6680
 6685
 6690
 6695
 6700
 6705
 6710
 6715
 6720
 6725
 6730
 6735
 6740
 6745
 6750
 6755
 6760
 6765
 6770
 6775
 6780
 6785
 6790
 6795
 6800
 6805
 6810
 6815
 6820
 6825
 6830
 6835
 6840
 6845
 6850
 6855
 6860
 6865
 6870
 6875
 6880
 6885
 6890
 6895
 6900

The claims defining the invention are as follows:

1. A method for downloading programming to a gaming terminal from a remote site, wherein said programming can appropriately be downloaded only to a gaming terminal with components having at least a first set of characteristics, the method comprising:
providing a gaming terminal having at least a first circuit board with a memory, at least a
5 portion of which is non-erasable memory;
storing in said non-erasable memory, at least first information indicative of
characteristics of said first circuit board;
transmitting said first information from said gaming terminal to said remote site;
10 downloading said information only if said characteristics of said first circuit board match
said first set of characteristics.
2. A method, as claimed in claim 1, wherein said non-erasable memory is one-time
programmable memory.
3. A method as claimed in claim 2 wherein said step of transmitting comprises
transmitting all programmed portions of said one-time programmable memory.
4. A method, as claimed in claim 1, wherein said information indicative of
characteristics of said first circuit board includes information selected from the group consisting
of

P-215

memory serial number

5

an Identification number

date of manufacture

platform

target

vendor identification

board clock speed

processor type.

5. A method, as claimed in claim 1, further comprising:

using said information indicative of characteristics of said first circuit board to identify a gaming jurisdiction location of said gaming terminal; and

downloading said programming only if said programming has been approved for said gaming jurisdiction.

6. A method, as claimed in claim 1 wherein said step of providing comprises providing an EEPROM which is configured with a row of one-time programmable memory.

7. A method, as claimed in claim 1, wherein a plurality of programs is stored at said remote location and further comprising using said information indicative of characteristics of said first circuit board to select a program for downloading to said gaming terminal.

8. A method, as claimed in claim 1, wherein said step of transmitting is performed in response to a query sent from said remote location to said gaming terminal.

9. Apparatus usable for downloading programming to a gaming terminal from a remote site, wherein said programming can appropriately be downloaded only to a gaming terminal with components having at least a first set of characteristics, the apparatus comprising:

at least a first circuit board in said gaming terminal having with a memory, at least a portion of which is non-erasable memory, at least first information indicative of characteristics of said first circuit board stored in said non-erasable memory

means for transmitting said first information from said gaming terminal to said remote site;

means for downloading said information only if said characteristics of said first circuit board match said first set of characteristics.

10. Apparatus, as claimed in claim 9 wherein said memory comprises read-only memory.

11. Apparatus, as claimed in claim 9 wherein said memory comprises EPROM memory.

12. Apparatus, as claimed in claim 9, wherein said non-erasable memory is one-time programmable memory.

13. Apparatus as claimed in claim 12 wherein said means for transmitting transmits all programmed portions of said one-time programmable memory.

14. Apparatus, as claimed in claim 9, wherein said information indicative of characteristics of said first circuit board includes information selected from the group consisting of

memory serial number
an Identification number
date of manufacture
platform
target
vendor identification
board clock speed
processor type.

15. Apparatus, as claimed in claim 9, further comprising:
means for identifying a gaming jurisdiction location of said gaming terminal using said information indicative of characteristics of said first circuit board; and

means for downloading said programming only if said programming has been approved

5 for said gaming jurisdiction.

16. Apparatus, as claimed in claim 9, wherein a plurality of programs is stored at said remote location and further comprising means for selecting a program for downloading to said gaming terminal, using said information indicative of characteristics of said first circuit board.

17. Apparatus, as claimed in claim 9, wherein said first circuit board is a game controller board.

18. Apparatus, as claimed in claim 9 wherein said first circuit board is a peripheral controller board.

19. A method for downloading programming to a gaming terminal from a remote site, substantially as described herein with reference to any one of the embodiments, as that embodiment is described in the accompanying drawings.

20. Apparatus usable for downloading programming to a gaming terminal from a remote site, substantially as described herein with reference to any one of the embodiments, as that embodiment is described in the accompanying drawings.

DATED this Thirteenth Day of October, 1999

International Game Technology

Patent Attorneys for the Applicant

SPRUSON & FERGUSON

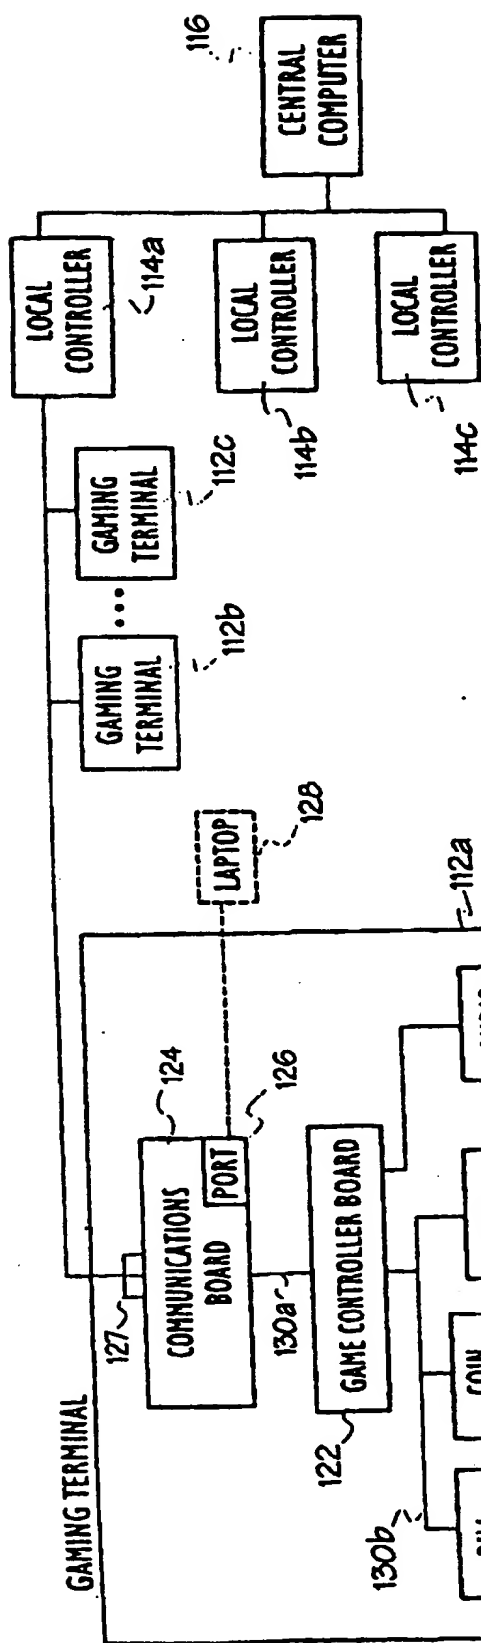


FIG. 1A

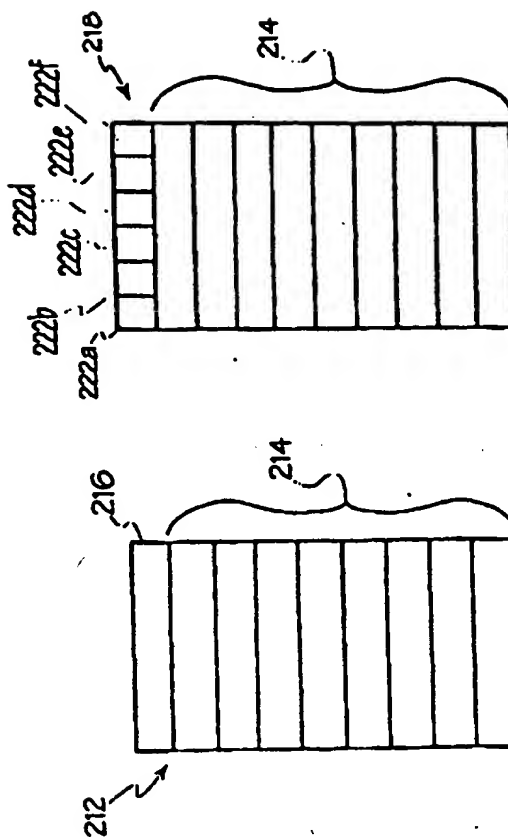


FIG. 2A

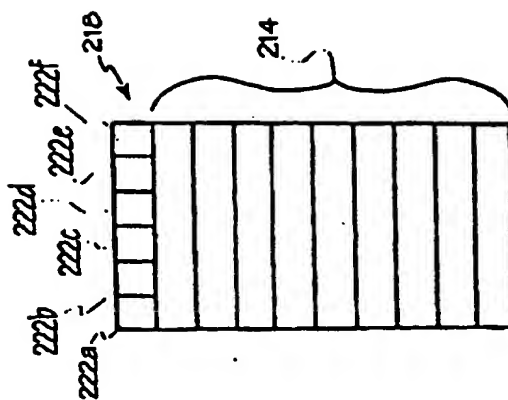


FIG. 2B

14 10 00 34012

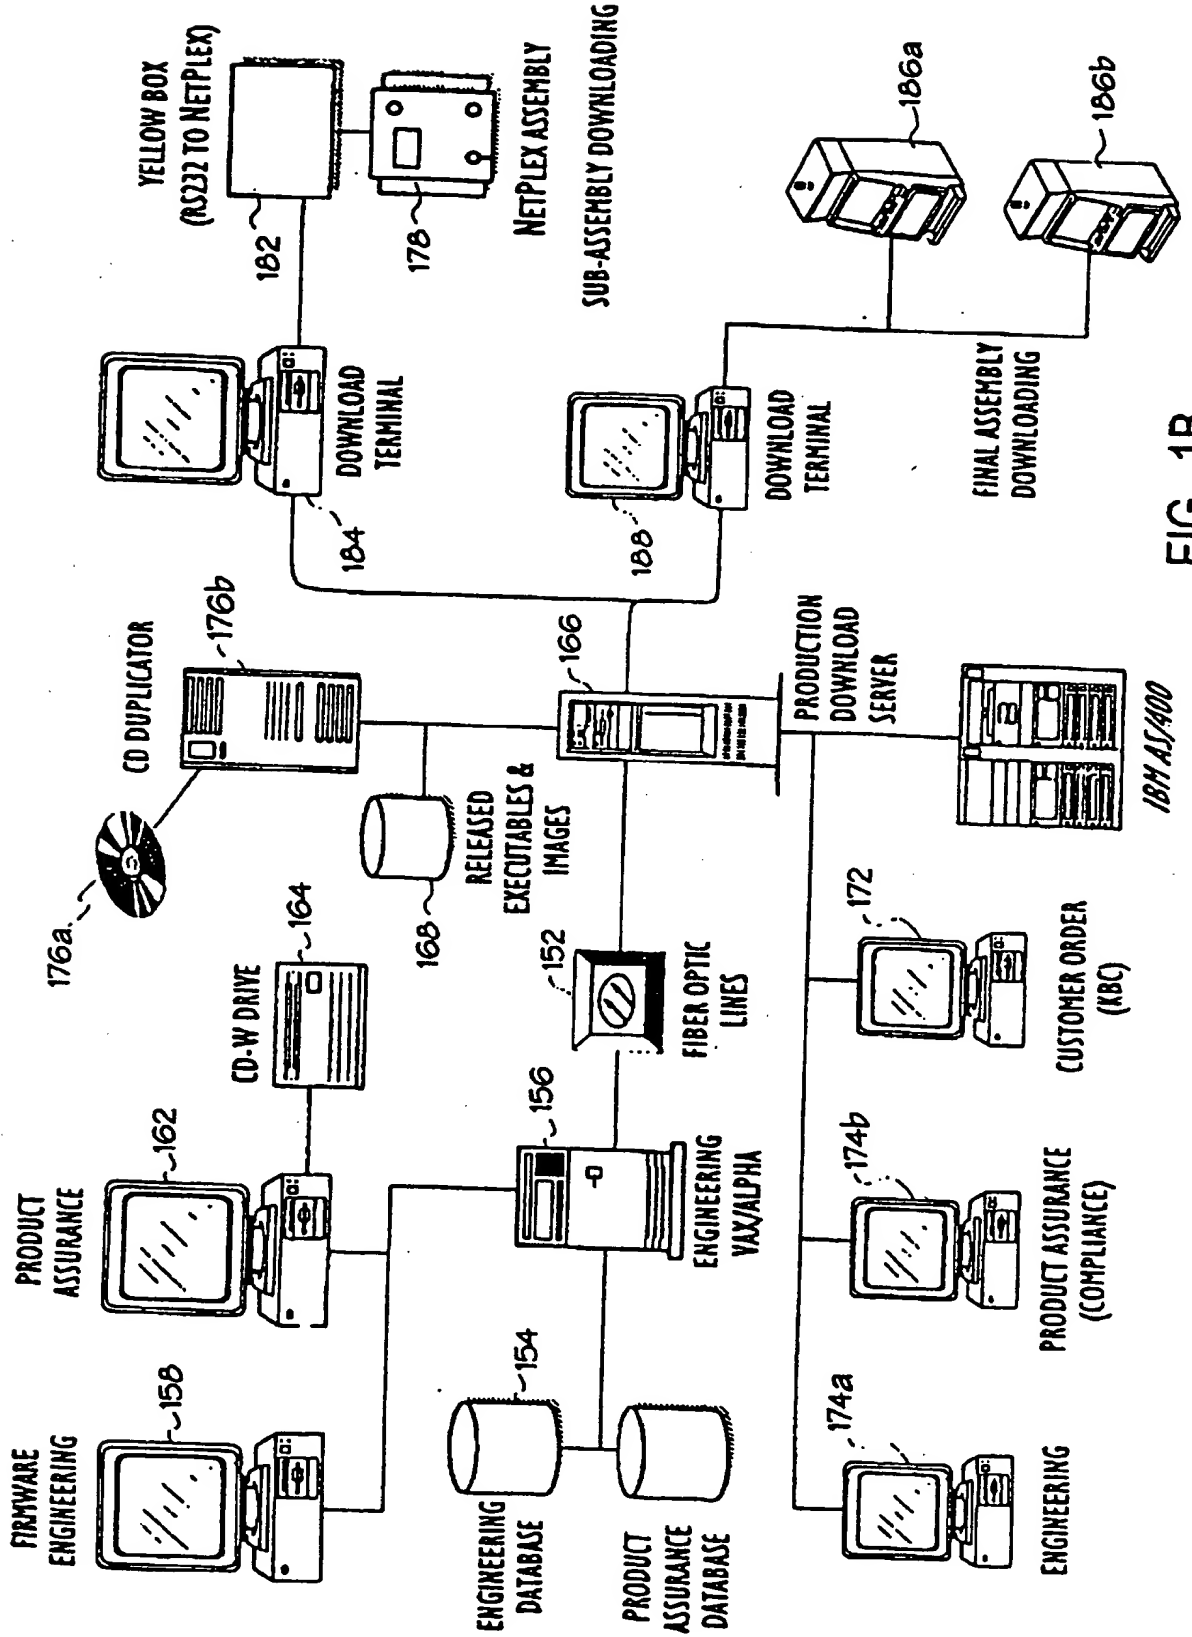


FIG. 1B

14 10 99 54032

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 001 391 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

17.05.2000 Bulletin 2000/20

(51) Int. Cl.⁷: **G07F 17/32**

(21) Application number: 99119352.5

(22) Date of filing: 29.09.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 14.10.1998 US 172787

(71) Applicant:

International Game Technology
Reno, Nevada 89511-8986 (US)

(72) Inventors:

- Wells, Bill
Reno, Nevada 89502 (US)
- McGlone, James T.
Reno, Nevada 89511 (US)

(74) Representative:

Manitz, Finsterwald & Partner
Postfach 22 16 11
80506 München (DE)

(54) **Gaming device identification method and apparatus**

(57) An electronic memory which cannot be modified or erased, such as one-time programmable or add-only (OTP/AO) memory is used for storing direct or indirect indications of characteristics of a gaming terminal or its components. Preferably, a plurality of gaming terminal boards includes memory that has one or more rows of OTP/AO memory for storing information such as memory or board serial numbers, manufacture date, processor speed or type, software or hardware version numbers, and the like. Such information is preferably used in connection with assuring the appropriateness of modifications or configurations of the gaming terminal, such as downloading software or other software modification and/or changes to hardware configuration. OTP/AO information can be used in connection with verifying identity or characteristics of software or hardware, e.g. for warranty purposes. The non-erasable and non-modifiable nature of the information provides assurance that software downloads or other modifications will not be inappropriate because of inadvertent or intentional misidentification of a component.

EP 1 001 391 A2

Description

FIELD OF THE INVENTION

5 [0001] The present invention relates an identification method and apparatus for use in identifying components of a gaming device such as a slot machine, card game machine, keno machine and the like, and, in particular, identification for machine components using a non-erasable electronic memory or memory portion such as a memory with write-once or add-only characteristics.

10 BACKGROUND INFORMATION

[0002] Many current gaming machines are configured with electronic components, commonly mounted on one or more printed circuit boards (PCBs). Many such electronic components use programming or other information stored in memories. In at least one typical configuration, a gaming terminal or gaming machine will include a controller board, a communications board or module, and one or more so-called peripheral boards such as a display controller board, a currency acceptor board, a coin handler board, and the like. Typically one or more of the boards, such as, e.g., the game controller board, a processor (microprocessor) or other computer unit which often operates based on programming or other information (software or firmware) stored in a memory such as one or more electronically erasable programmable read-only memories (EEPROMS). Such software or firmware may be programmed or stored in the memory locations during the manufacturing or assembly of the gaming device. Additionally, software or firmware may be provided to replace or supplement the software or firmware in a gaming device which is in operation (in the field), e.g. to update the machine configuration (such as adding new features, new games and the like, and/or to correct programming errors). In either case, the new firmware or software is transferred or "downloaded" from a source (which may be, e.g., a computer such as a workstation, personal computer, laptop computer, and the like) to the "target" memory in a particular gaming terminal or machine.

[0003] Although downloading from one computer to another is, in general, a process that is currently known, downloading software or firmware to components of gaming devices presents particular problems not readily addressed by conventional downloading techniques and apparatus.

[0004] One feature applicable to gaming device downloading is the stringent regulatory oversight and control exercised by gaming regulatory authorities in many jurisdictions. In many, and perhaps all, regulated gaming jurisdictions, downloading of software or firmware to a gaming terminal will not be permitted without some assurance that the new software or firmware will comply with local regulations. For example, a gaming regulatory authority in one jurisdiction may require assurance that downloading to, e.g., update bill acceptor software will result in a machine having bill acceptor software appropriate (and approved) for that jurisdiction (and will not, e.g., run the risk of inadvertently and/or intentionally downloading bill acceptor software that was approved in a different jurisdiction, or not at all).

[0005] It is also commonly found that gaming devices occur in a wide variety of configurations, such as employing numerous different types of processors, memories, game configurations, versions and types, peripheral hardware and software and the like. Additionally, owing to differences in manufacturing dates, maintenance history and the like, gaming devices are often encountered with a wide variety of different hardware and software components which may not be apparent (or may be discernable only with difficulty) from a visual inspection of the gaming device, its components or operation. For this reason, when it is desired to download software to a particular gaming terminal, it is typically necessary to select a particular software version for downloading, bearing in mind the types of software and hardware found on the particular gaming terminal, lest the newly-downloaded software is incompatible with the gaming terminal or results in operation which is not approved by a particular jurisdiction. Additionally, it is possible that the software or firmware which is to be downloaded is, in fact, already present on a particular gaming terminal so that the download process represents a waste of time and effort.

[0006] In typical previous situations, in order to download software or firmware to a gaming terminal, characteristics of the gaming terminal and/or its components were determined manually, such as by visually inspecting the components and/or running tests of diagnostics on a component in an attempt to determine characteristics such as the version or type of a particular board, the processor speed associated with a particular board, the version of software or hardware components, and the like. Such manual determination of characteristics has, in the past, typically required a significant investment of time, especially when a relatively large number of gaming terminals are being programmed or re-programmed, and, to make matters worse, the time investment is typically made by relatively highly-trained personnel who have the background and experience required to analyze the hardware/software components that are present. Such investment of time by relatively highly-trained personnel represents a significant expense involved in downloading information which, owing at least partly to the regulatory environment found for gaming devices, was previously believed to be largely unavoidable. Furthermore, it has been found that even relatively highly-trained personnel have a undesirably high error rate when attempting to determine characteristics needed for a download, which may lead to inoperabil-

ity or improper operation of a gaming device, violation of gaming jurisdiction laws or rules and may require an additional investment of time to detect and/or correct such errors.

[0007] In addition to a downloading context identification of gaming device components or component characteristics may be useful in the context of gaming device maintenance, service or warranty fulfillment. For example, when determining whether a repair of a gaming terminal is covered by a warranty, it may be necessary to determine when the gaming terminal was manufactured or when one of the components was manufactured or last repaired or revised.

[0008] Another feature of many gaming devices which affects the manner in which revisions of software or firmware (or hardware) can or should be performed is the fact that gaming devices are often configured to dispense money so that there is a potential for modifications or downloads to be intentionally performed in an unauthorized fashion in such a manner as to create unauthorized or improper payouts. This is a potential which is typically not present in many other types of downloads from one computer to another. Accordingly, it is important, not only to gaming regulatory authorities but also casinos or other game operators, to achieve a level of confidence that, not only will inadvertent (e.g. cross-jurisdictional) downloads be avoided, but there are procedures in place to avoid or prevent intentional or unauthorized downloads.

[0009] Accordingly, it would be advantageous to provide a method and apparatus for downloading by which the characteristics of a gaming terminal needed to avoid inadvertent or intentional improper downloads can be determined substantially automatically, i.e. while reducing, or, preferably, eliminating the need for manual characteristic determination, visual inspection of machines, their components or operation and the like. It would be particularly advantageous to provide a download process which can obtain such gaming terminal or gaming terminal component characteristics entirely automatically, i.e. using only computers or other machines and without the need for any human input or effort to accomplish such determination of characteristics. It would further be advantageous to provide such a system and method which would reduce or eliminate the potential for errors in, or unauthorized tampering with, the identification system.

SUMMARY OF THE INVENTION

[0010] The present invention includes providing gaming terminal or gaming terminal components with information usable for characterizing gaming terminal components, which is electronically stored in a memory or portion of memory which is add-only memory (AO) or one-time programmable (OTP) memory. By storing, in such memory, information which either uniquely identifies a component or identifies characteristics of a component, it is possible to configure a download system which can automatically obtain the information needed to perform a download while achieving a level of security required to make such automatic download feasible in view of the requirements of gaming regulators and/or game operators. In one embodiment, a game controller card and a plurality of peripheral cards are each provided with certain memory locations which contain information in a fashion that such information, as a practical matter, cannot be erased or changed. Such memory locations can be used to store, e.g., a unique serial number or other unique identifier, hardware characteristic information such as processor type or speed, vendor identification, date of manufacture, and the like. In this way, before downloading information to a gaming terminal, it is possible to automatically (substantially without human intervention or effort) verify that the download will be proper, such as to verify that the jurisdiction for which the gaming terminal is configured (or where the casino or other purchaser is located) is the same as the jurisdiction for which the new software has been approved, to verify that the clock speed and/or data transfer speed for which the new software is designed (or at which the download is to take place) is compatible with the clock speed of the gaming terminal or its component, that the software to be downloaded is known to be compatible with other software and/or hardware on the gaming terminal that will remain in place, and the like.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Figs. 1A and B are block diagrams depicting components of multi-terminal gaming or production systems, including components of a gaming terminal of a type which may be used in connection with the present invention; Figs. 2A and B are block diagrams illustrating examples of memories which may be used in connection with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0012] Although the present invention can be used in connection with many types of gaming terminals, either as stand-alone devices or coupled in any of a number of different multi-terminal configurations, Fig. 1A depicts one example of a gaming terminal 112a coupled, along with other gaming terminals 112, via one or more local controllers 114

a,b,c to a central computer 116. In the embodiment of Fig. 1A, gaming terminal 112a (and, typically, all gaming terminals in the group) includes a game controller board 122 which will typically include, among other items, a microprocessor and a memory such as an EEPROM storing programming and/or other information for controlling operation of the controller board 122. Typically the hardware and software of the game controller board 122 will contain information or programming defining the type of game and making determinations of local win/loss outcome (as opposed to, e.g., non-local, progressive win/loss outcomes) for the gaming terminal 112a. Because of the central role of the game controller board 122 in determining game win/loss and, thus, in determining any monetary payout, it is particularly important to assure the presence of the correct software for the game controller board e.g. to avoid improper or incorrect payouts and to assure compliance with local regulatory authorities.

[0013] Although it is possible to combine numerous functions onto a given board, typically numerous boards will be provided in a gaming terminal for forming a plurality of functions. In the depicted embodiment, the game controller board communicates with a communications board 124 which provides information to and, receives information from a local controller 114a and/or central computer 116, for purposes such as monitoring use and performance, assuring compliance, performing accounting and similar functions, and facilitating implementation of progressive or other multi-terminal based games or prizes. In one embodiment, the communications board 124 includes one or more ports by which a laptop 128 or other computer may be coupled to the gaming terminal 112a for, among other purposes, downloading as described more fully below.

[0014] In the embodiment of Fig. 1A, a plurality of peripheral boards 128a-d communicate with the game controller board 122 and control various peripheral devices for performing various functions such as bill acceptor functions 132a, coin handling functions 134a, 132b, video functions 132c and audio output functions 132d. In many configurations, some or all of the peripheral and other boards 128a-d, 124 will contain memories, such as flash memory, EEPROMs or other devices for storing software or firmware controlling their functions (such as by containing software or firmware for running on microprocessors or other computing devices on such boards). In the strict regulatory environment for many gaming devices, it is typically necessary to provide assurance that only approved and proper software is used in the peripheral and other boards, (in addition to that provided on the game controller board).

[0015] In typical previous devices, the boards provided in a gaming terminal are secured from casual or unauthorized inspection or access such as by being housed in a normally-locked cabinet portion of the gaming terminal. Thus, in previous systems when it was desired (as described above) to (manually) verify the type or characteristics of boards on a gaming terminal (e.g. prior to a download or other updating purpose or for warranty or service purposes) it was typically necessary for a relatively highly trained worker to inactivate a gaming terminal, unlock the cabinet portion, and physically inspect (often involving removal of) one or more of the boards 122-128 of a gaming terminal 112a. Depending on the nature of the work to be performed, the skilled personnel may need to rely on experience and knowledge to recognize and distinguish different boards based on their appearance and/or notations, markings or indicia provided on boards and/or perform tests or diagnostics on the board to obtain the necessary information regarding characteristics of the board and/or its identity or history.

[0016] Fig 1B depicts a system usable in subassembly or final assembly downloading, e.g., in a gaming terminal manufacturing environment. Fig. 1B includes a plurality of computers such as workstation computers, network server computers, and/or PC-type computers coupled by network lines such as fiber optic lines 152 in a manner well-known to those of skill in computer network technologies.

[0017] At various stages in employing the system of Fig. 1B, programming data or other information is stored in a number of different storage systems such as data bases (typically providing storage on hard drives or other well-known storage media). In the depicted embodiment, information, during program design process, is held in an engineering database 154. And software and firmware engineers use and modify such information via computers 156, 158 having at least indirect access to engineering database 154. Preferably, programs or other data which are still in the development phase are restricted to the engineering database 154 and are not stored in other databases. At some point, engineering will release the program or other information to product assurance 162 which, after review, will submit the programming or data (e.g. via writing on a CD 164 to a gaming jurisdiction for approval. After the program or data is approved by the gaming jurisdiction, the program is copied to a production download server 166 and, preferably, stored in a released database 168. Information about the approved program is provided to a customer order system 172 and other systems such as engineering 174a and product assurance 174b. Although released programs may be provided in various forms such as on CD ROM 176 via a CD duplicator 176b, Fig. 1B also illustrates a system for downloading programming data or other information as part of a gaming terminal assembly or fabrication system. The programming or data may be loaded onto boards or other subassemblies 178, e.g. via a translator/power assembly 182 and download terminal 184 or may be loaded into one or more gaming terminals 186a,b, e.g. via connection to a communication board for downloading, in turn, to target peripheral devices or other subassemblies within the gaming terminals 186a, 186b, e.g. via a download terminal 188.

[0018] As with downloading in the field, as depicted in Fig. 1A, downloading on the fabrication or assembly line, as depicted in Fig. 1B in the strict regulatory environment for many gaming devices, it is typically necessary to provide

assurance that only approved and proper software and data is used in the gaming terminals, including peripheral and other boards (in addition to that provided on, e.g., the game controller board). Depending on the nature of the download, it will be advantageous, in performing assembly line downloading, to recognize or distinguish different boards, e.g. to obtain information regarding characteristics of the Board and/or its identity or history.

[0019] According to an embodiment of the invention, automation of the step of obtaining gaming terminal component characteristics is enabled or facilitated by including, on one or more of the gaming terminal boards or other components, an electronic memory device, e.g., of the type depicted in block diagram fashion, in Figs. 2A or 2B.

[0020] In the embodiment of Fig. 2A, a memory device such as an EEPROM 212 is provided with a plurality of memory locations 214 which are preferably of a type which may be programmed or written to many times. The memory device 212 is also provided with at least some memory locations 216 (such as a one or more rows of memory) which are configured such that they cannot be erased or changed after they have been written to or programmed. In the embodiment of Fig. 2A, the memory locations 216 are write-once or one time programmable (OTP) memory, meaning that after any of the program locations in the memory region 216 have been written to or programmed, subsequently none of the memory locations in the memory region 216 can be changed or erased. One example of this type of memory is that sold under Model No. M34R32 available from S.G.S. Thomson. This device provides 4096 bytes of EEPROM space 214 with an additional 32-byte OTP row 216.

[0021] Fig. 2B depicts a type of memory having a plurality of programmable memory locations 214 and a region of memory 218 (such as a row of memory) which is add-only (AO) memory. In add-only memory, it is possible to write to or program some of a plurality of memory locations 222a-222f, without writing to others. In the add-only row 218, after any memory location or group of locations 222 have been written to or programmed, those same memory locations cannot, thereafter, be changed or erased. However, memory locations in the row 218 which have not been previously written to or programmed can be, later, written to or programmed (once) even after a process of writing to or programming other memory locations in the same region or row 218. For example, in add-only memory, it is possible to program, e.g., a first memory location 222a at a first time such that the first memory location 222a cannot thereafter be changed or erased after said first time, but to still permit programming or writing to, e.g. a second (previously unprogrammed) memory location 222b at a second time, after said first time, such that the second memory location 222b cannot be changed or erased after the second time. In this way, as long as there remain memory locations in the add-only region 218 which have not previously been programmed or written to, it is possible to add further information to the add-only region 218. However, although it is possible to add information to the region 218 (as long as unprogrammed space remains) it is never possible to erase or change information once it has been written to the add-only region 218. One example of add-only memory is available from Dallas Semiconductor.

[0022] According to an embodiment of the invention, OTP or add-only (OTP/AO) memory is provided in each gaming terminal, preferably on at least one board of each gaming terminal (such as the game controller board) and, typically, on one or more peripheral boards 128a-128d or other boards or components. It is possible to provide for systems in which some gaming terminals 112a are provided with OTP/AO memory while others e.g. 112c are not (e.g. when, in the context of a networked casino system, some gaming terminals have been upgraded or replaced while others have not).

[0023] There are three major procedures or steps in connection with using such OTP/AO memory in embodiments of the present invention: storing the desired information onto the OTP/AO memory, reading or retrieving the information stored in the OTP/AO region, and using such retrieved information, e.g. for secure downloading. These processes involve communicating information between the OTP/AO memory and an external (to the gaming terminal) device (typically one or more computers 116, 128). Although it would be possible to configure a system in which a gaming terminal contains only a single OTP/AO memory device which stores information relative to a plurality of different hardware components (such as identifying two or more different boards 122a-128d) it is preferred to provide a separate OTP/AO device on each separate board. In this way, changes to hardware (or, in some configurations, software) can be recorded directly on the changed component so that when components are physically removed (such as "swapping in" a new board) and/or modified (such as by changing jumper connections on a board) information relating to the identity and/or configuration of that board, stored on the on-board OTP/AO memory, will "travel with" the board.

[0024] Although it would be possible to configure a gaming terminal so that two or more boards (such as each board having an OTP/AO memory) were provided with a port or other connection specific to that board, to facilitate reading the OTP/AO memory of that board, preferably, the gaming terminal is provided with one or more system ports 126 or similar communication connections 127 through which it is possible to obtain or transmit information relating to any of a plurality of OTP/AO memories in the gaming terminal (e.g. via gaming terminal buses or other internal communication links 130 a-f). The ports 126, 127 may be provided on any of a number of gaming terminal components including the game controller board 122, but are preferably included in a separate communications board 124.

[0025] The information stored on the OTP/AO memory may indicate characteristics of the board's (or other component's) hardware or software either directly or indirectly. The information may indicate characteristics directly by, e.g., storing information in either coded or human readable (e.g. ASCII character form) which identifies such characteristics

such as storing board or download clock speed, board processor type and the like. An example of information which indirectly indicates hardware or software characteristics of the board or component includes storage of an EEPROM serial number (which, e.g., may be used as an index into an off-board database which stores characteristics corresponding to such serial number). It is possible to store both direct and indirect indicators of characteristics on an OTP/AO memory. It is also possible to store information which has both indirect and direct uses. For example, storing a date of manufacture on an OTP/AO memory may be used as all or part of an index into a database to determine other board characteristics and/or may be used directly, where the date of manufacture is itself a relevant characteristic (such as for warranty or repair purposes).

[0026] Information may be stored into OTP/AO memory in a number of fashions. In one embodiment, some or all of the information stored in the OTP/AO memory is stored at the time of memory manufacture, by the memory fabricator. Examples of information that may be stored in this fashion include memory serial (or other preferably unique) numbers and/or date of manufacture. Some or all information stored in an OTP/AO memory may be stored at the time of board manufacture (rather than memory manufacture) and/or may be stored at the time software is initially downloaded or programmed into a gaming terminal (or components thereof). Examples of information that might be stored in this fashion include board (rather than memory) serial number or version numbers, clock speed, processor type, software indicators or version numbers, date of assembly (board assembly or gaming terminal assembly) and/or an indicator of (initial) gaming regulatory jurisdiction (e.g. to distinguish a board intended for a first country or state from that intended for use in a second country or state).

[0027] Some or all of the information stored on OTP/AO memory may be stored at the time a gaming terminal is sold to, shipped to or received at a particular customer location or gaming jurisdiction. Some or all information stored in the AO memory may be stored when a gaming terminal component is revised, repaired, updated, reconfigured or the like (including both software and hardware revisions). Preferably, the information stored in OTP/AO memory includes information that can be used for error or data integrity checks such as cyclic redundancy check (CRC) information, one or more parity bits or the like. In the case of write-only or one-time programmable memory, the error/data integrity check information is written when the memory is initially programmed. In the case of add-on memory, error checking or data integrity information may be stored (in a previously unprogrammed AO memory location) each time additional information is stored in the add-on memory. The provision of error checking or data integrity information is particularly useful or necessary in providing the capability of downloading to gaming terminals (e.g. in order to provide the desirable or required confidence that inadvertent or intentional changes are not made to a gaming terminal in such a fashion as to result in gaming terminal operation which is out of compliance with local gaming regulations). For example, in the absence of an error or data integrity check, it might be possible that a memory read error would permit downloading of a program configured for a first jurisdiction, into a machine located in a second jurisdiction (e.g. because, the laptop 128 or other source of download programming selected the "wrong" program or downloading based on incorrect information). It is believed that providing error or data integrity check information in OTP/AO memory will assist in preventing, or at least reducing the likelihood of, this type of improper download.

[0028] Table I provides one example of a set of information that may be stored in OTP/AO memory according to one embodiment of the invention. In one embodiment, data stored in the OTP row and/or in the ROM are stored in little endian format. In the example of Table I, items indicated having a potential use of "revision control" are, in at least one embodiment, used during download operations. Preferably the EEPROM serial number is a number which is unique for each EEPROM (at least for a given vendor and purchaser). The communications ID, may be, e.g. used by the board firmware for providing communication to a host computer. The platform and target information may be used in connection with, e.g., host to terminal download communications. The vendor ID may be a code used for identifying the vendor of the EEPROM. The clock speed may be used in connection with allowing the peripheral board firmware to communicate with a host computer. Preferably the CRC is used by the board firmware to validate the OTP data before its use.

[0029] In addition to the data defined in the OTP row, according to one embodiment, the first 20 bytes as of the EEPROM normal memory space will be used for storing, e.g., printed circuit board serial number information of the peripheral board. e.g., stored in ASCII format. Preferably, two bytes of CRC information is also provided. To protect this information from corruption, preferably the first sixty-four bytes of the EEPROM space is configured as read only memory (ROM).

Table I

OTP Row Memory Allocation				
Starting Address (hexa- decimal)	Bytes	Format	Description	Potential Uses
0x00	4	Binary	EEPROM serial number	Revision Control

Table I (continued)

OTP Row Memory Allocation				
Starting Address (hexa- decimal)	Bytes	Format	Description	Potential Uses
0x04	1	Binary	Communications ID	Used at Powerup for Intra-Game Communications
0x05	7	ASCII	Date of manufacture	Warranty/Service/Revision Control
0x0C	2	Binary	Platform and target	Intended Use
0x0E	8	ASCII	Vendor ID	Warranty/QC/Service
0x16	1	Binary	Clock Speed	Used at Powerup for Intra-Game Communication
0x17	1	Binary	Processor Type	Used at Powerup for Intra-Game Communication
0x18	6		Reserved for future use	
0x1E	2	Binary	2-byte CCITT CRC	Error/Data Integrity Check

[0030] Although it is contemplated that the gaming terminal component characteristic information stored or indicated in the OTP/AO memory will be particularly useful in connection with download of information, (as described more fully below). It is also believed that the information may be useful in other contexts. Examples of other uses for OTP/AO information according to embodiments of the present invention, include providing the ability of gaming regulators to verify (e.g. on a random basis or for specific regulatory purposes) that a gaming terminal is configured properly for a particular jurisdiction, allowing personnel responsible for maintaining, repairing or updating gaming terminals to verify that a particular gaming terminal includes particular components, uploading information regarding gaming terminal components e.g. as part of a trouble report, inventory or tracking procedure, verifying characteristics, such as manufacture or sale date, of a gaming terminal or components thereof in connection with making decisions on warranty coverage, and the like.

[0031] Regardless of the purpose for reading information stored on an OTP/AO memory in a gaming terminal, the reading procedure will, at least in one embodiment, include sending a read command e.g. from a laptop 128 or central computer 116 via a port 126,127 to a communications board 124, (with the command typically either specifying that all OTP/AO memories should be read or specifying which board or OTP/AO board memory should be queried) and sending a read command (e.g. over a control line or a portion of communication bus 130) which contains or indicates read addresses for one or more OTP/AO memory portions. The commands may be configured to retrieve selected (addressed) portions or fields of the OTP/AO memory or may be configured to return the entire OTP/AO contents (e.g. a OTP/AO "row" of memory). In one embodiment, it is preferred to always return the entire contents of OTP/AO memory (particularly in the case of add-on memory) e.g. to help ensure that there has been no intentional or inadvertent storage of incorrect or misleading information in OTP/AO memory. For example, if a new (previously unprogrammed) field of an add-on memory has been programmed to reflect a new jurisdiction (i.e. a jurisdiction different from the original gaming regulatory jurisdiction programmed in the AO memory) reading the entire row would alert the download software that there has been a change in jurisdiction (and, if desired, prompt a check of the database to verify that this change in jurisdiction was correct and/or authorized), whereas reading only the newest or most recent fields of AO memory could result in downloading an unauthorized program (e.g. a program authorized only for a different jurisdiction). Thus, in a procedure where only the most recently programmed fields are read, there might be no indicator that the jurisdiction information may have been tampered with or inadvertently modified.

[0032] Hardware or software characterizing information read from the OTP/AO memory can be used in a number of fashions. In one embodiment, the information is used in downloading software to a gaming terminal (or components thereof). Procedures for downloading can be similar to those described e.g., in U.S. patent application number _____, attorney file no. 3735-923 titled "Method for downloading data to gaming devices" filed on the even date herewith, and/or Serial No. _____ (attorney file number 3735-905-CON), filed June 1, 1998 which is a continuation of Serial No. 08/600,311 (attorney file number 27224-90500) for "Peripheral Device Download Method and Apparatus" filed February 12, 1996, all incorporated herein by reference.

[0033] The present invention can be used in connection with a process that involves loading information, received from an external device (such as a central computer) by a computing device (such as the microprocessor on the controller board) to a target which may be a gaming terminal component, including one or more peripheral devices. In this

way it is unnecessary to have separate ports on each board for direct access to the peripheral devices (or other gaming terminal components) or related memories, thus making the process of updating the programming for peripheral devices or other gaming terminal components less time-intensive and less labor-intensive. In one embodiment, an updated or modified program is received in the gaming terminal from an external device (such as a hand-held or portable device or a central computer coupled via a communications link) and is downloaded or passed-through from the controller board to one or more coupled peripheral devices. Preferably, the programming information is downloaded in such a way as to reduce or minimize the amount of down time or inconvenience to players. In one embodiment, when the new program is downloaded from a central computer to each gaming terminal, the method avoids disabling all gaming terminals at the same time, such as by waiting until the gaming terminal is idle for a predetermined period before downloading or by cycling through various gaming terminals or groups of gaming terminals so that a relatively small number of the gaming terminals are disabled (for reprogramming) at any one time. When reprogramming of two or more peripherals attached to a given gaming terminal is desired, in one embodiment the new programming information for each device to be reprogrammed is downloaded to the gaming terminal and the gaming terminal begins downloading the information to the attached peripherals preferably only after all information has been downloaded to the terminal. In this way, only a single session of downloading to the gaming terminal is needed in order to provide eventual updating of two or more coupled peripherals or other components. In situations in which security is a concern, such as systems in which money handling occurs (e.g., gaming terminals, lottery terminals, and the like), it may be useful for the information to be encrypted when it is transferred to the computing device and is decrypted preferably in the gaming terminal. In one embodiment, the invention includes providing at least a first memory in a gaming terminal as a programmable memory; transmitting first information from an external source to the gaming device; transmitting the first information for receipt by said peripheral device; storing the first information in the first memory; and using the first information during operation of the peripheral device. Preferably such a method includes identification of the gaming terminal hardware or software, preferably using one or more memory devices which have identifying and/or characteristic-indicating information stored in non-erasable, non-modifiable memory, such as OTP/AO memory.

[0034] Downloading can be performed locally (e.g. by connection of a laptop 128 or other computer to the communications board 124 of a gaming terminal 112a or remotely from a local controller 114a or central computer 116. Preferably the downloading includes verifying the propriety of the software to be downloaded and/or verifying or adjusting download procedures (data transfer rate, error detection/correction procedures and the like) so that the download will result in a gaming terminal that is appropriately configured and operates as desired. Preferably, it is the source computer 128, 116 which performs such verifying. It is noted, however, that while such source-based checking will assist in eliminating or reducing the occurrence of, e.g. inadvertently inappropriate downloads, it might be possible to configure a laptop 128 to purposely download incorrect or inappropriate software. Accordingly, it would also be possible to configure the destination (the gaming terminal) in such a way that it will actively block or prevent downloading of software unless the software to be downloaded is identified by the destination (gaming terminal) as appropriate (based, at least in part, on information stored in OTP/AO memory). In this way, if an attempt was made to download a version of gaming software which, e.g., did not include a properly encrypted password for authenticating that the proposed download software has been approved by the appropriate gaming regulatory authorities, the gaming terminal 112a would, preferably, block or prevent the downloading of such software.

[0035] Another example of a use of information read from OTP/AO memory in a gaming terminal is to verify warranty coverage for servicing or repair of a gaming terminal. For example, if a particular gaming terminal was covered by a one-year warranty, it would be possible to configure the system such that a service person could determine the date of sale or delivery of a gaming terminal (or a component thereof), either directly or indirectly, based on information read from OTP/AO memory. As noted above, particularly in the case of AO memory, it is useful to configure a system to always read the entire memory row, e.g. to avoid a situation in which a new AO memory field is written with an incorrect sale date indicator (either inadvertently or intentionally).

[0036] Another situation in which information stored in OTP/AO memory may be used includes the manufacturing process and in particular the management of software downloading as part of a gaming terminal manufacturing process. An example of a use of component identification in connection with such management is described, e.g., U.S. patent application no. _____ (attorney file no. 3735-925) titled "Program Management for Downloadable Devices", filed on even date herewith and incorporated herein by reference. Briefly, information stored in OTP/AO memory can be used in a number of such management procedures including verifying that the hardware present in a particular gaming terminal or component is compatible with a particular download procedure (e.g. a download bit rate or error detection/correction procedure) and/or that the software is compatible with or appropriate for the hardware (or other software) present in the gaming terminal or component (e.g. the software is compatible with the particular microprocessor present in the gaming terminal or component). Furthermore, information in OTP/AO memory may be used at the completion of the gaming terminal assembly (and/or intermediate assembly stages) to verify that the various components of the gaming terminal are compatible with one another (e.g., the gaming terminal does not have a bill acceptor appropriate for a first jurisdiction and a coin handler board appropriate for a second (different) jurisdiction) and/or the

components and software in the gaming terminal are configured as desired (e.g. are approved for the gaming jurisdiction for which the gaming terminal is being built), includes the correct game software (e.g. does not download a poker game software when the terminal was intended to be a slot machine) and has the correct (typically most recent) version of software appropriate for the configuration of the gaming terminal. Additionally, information read from OTP/AO memory may be used in the management procedures to store appropriate information in a database. As noted above, in some configurations, a database is used to provide information about a gaming terminal, its configuration, components or history with such information being indexed, in the database, by information obtained from OTP/AO memory (e.g. a memory serial number or similar identifier number). Accordingly, as a gaming terminal is assembled, it is preferred, in at least this configuration, to read information from OTP/AO memory of the gaming terminal and its components, and store such information in a database, preferably in a fashion to achieve the desired database indexing or similar function.

[0037] In light of the above description, a number of advantages of the present invention can be seen. The present invention provides a way to identify a gaming terminal or its components in such a fashion as to substantially guard against inadvertent or intentional alterations (e.g. so as to increase the likelihood that gaming regulatory authorities will approve certain manufacture, assembly, repair and/or download procedures, particularly those which are at least partially automated and/or remote) by providing automatically accessible identification or characteristic information as part of the physical structure of the gaming terminal or component (e.g. as part of a memory mounted on a gaming terminal board). Preferably, the information travels with the gaming terminal or component and thus is automatically present and correct regardless of any changes (such as replacement of one or more boards of a gaming terminal). Because the information can be electronically programmed or stored (once only), the particular information which is provided or stored can be tailored to accommodate the contemplated use of the information (e.g. different manufacturers and/or different models or model lines of a given manufacturer may involve storing different information and/or storage in different formats). Because the stored information is provided electronically (rather than, e.g., provided as information printed or written on a circuit board) the likelihood of inadvertent or intentional modification of such information is lessened.

[0038] A number of variations and modifications of the invention can also be used. In general, it is possible to use some aspects of the invention without using others. For example, it is possible to provide non-erasable and non-modifiable information in connection with downloading software without providing information usable for or used with warranty verification. It is possible to store information in an encrypted or otherwise modified form. In one embodiment, some or all of the information which is used (e.g. in connection with downloading warranty verification and the like) and/or output from the device is stored in other memory or memory portions, such as normal EEPROM memory 214, e.g. with OTP/AO memory being used only for permitting access and/or verifying such memory (e.g. by providing an encryption key/decryption key, data integrity check information or the like). Although the non-erasable/modifiable memory is disclosed as being a portion of, or coupled to, normal EEPROM memory, it may be provided as a separate component or may be coupled to other types of memory. Although examples are provided in which a single row of OTP/AO memory is provided, more or fewer OTP/AO memory locations may be used.

[0039] In one embodiment, the gaming terminal is configured such that if an attempt is made to download certain types of improper software, the gaming terminal will be placed in an inoperative mode and/or notification of the attempt will be output e.g. to a local controller 114 or a central computer 116. Although, as noted, above, there are advantages to providing storage of characteristic-indicating information in electronic form, in one embodiment, information relating to characteristics (e.g. serial number, manufacture date or the like) may be stored or presented in optical (e.g. machine readable, bar code, or human readable form) e.g. on one or more of the gaming terminal boards. In this case, it may be useful to include a step which involves comparing the optical characteristic indicator with electronically-stored characteristic indicators.

[0040] The present invention, in various embodiments, includes components, methods, processes, systems and/or apparatus substantially as depicted and described herein, including various embodiments, subcombinations, and subsets thereof. The present invention, in various embodiments, includes providing devices and processes in the absence of items not depicted and/or described herein or in various embodiments hereof, including in the absence of such items as may have been used in previous devices or processes, e.g. for achieving ease and reducing cost of implementation.

[0041] The foregoing discussion of the invention has been presented for purposes of illustration and description. The foregoing is not intended to limit the invention to the form or forms disclosed herein. Although the description of the invention has included description of one or more embodiments and certain variations and modifications, other variations and modifications are within the scope of the invention, e.g. as may be within the skill and knowledge of those in the art, after understanding the present disclosure. It is intended the appended claims be construed to include alternative embodiments to the extent permitted.

Claims

1. A method for downloading programming to a gaming terminal from a remote site, wherein said programming can

appropriately be downloaded only to a gaming terminal with components having at least a first set of characteristics, the method comprising:

providing a gaming terminal having at least a first circuit board with a memory, at least a portion of which is non-erasable memory;
storing in said non-erasable memory, at least first information indicative of characteristics of said first circuit board;
transmitting said first information from said gaming terminal to said remote site;
downloading said information only if said characteristics of said first circuit board match said first set of characteristics.

2. A method, as claimed in claim 1, wherein said non-erasable memory is one-time programmable memory.

3. A method as claimed in claim 2 wherein said step of transmitting comprises transmitting all programmed portions of said one-time programmable memory.

4. A method, as claimed in claim 1, wherein said information indicative of characteristics of said first circuit board includes information selected from the group consisting of

memory serial number
an identification number
date of manufacture
platform
target
vendor identification
board clock speed
processor type.

5. A method, as claimed in claim 1, further comprising:

using said information indicative of characteristics of said first circuit board to identify a gaming jurisdiction location of said gaming terminal; and
downloading said programming only if said programming has been approved for said gaming jurisdiction.

6. A method, as claimed in claim 1 wherein said step of providing comprises providing an EEPROM which is configured with a row of one-time programmable memory.

7. A method, as claimed in claim 1, wherein a plurality of programs is stored at said remote location and further comprising using said information indicative of characteristics of said first circuit board to select a program for downloading to said gaming terminal.

8. A method, as claimed in claim 1, wherein said step of transmitting is performed in response to a query sent from said remote location to said gaming terminal.

9. Apparatus usable for downloading programming to a gaming terminal from a remote site, wherein said programming can appropriately be downloaded only to a gaming terminal with components having at least a first set of characteristics, the apparatus comprising:

at least a first circuit board in said gaming terminal having with a memory, at least a portion of which is non-erasable memory, at least first information indicative of characteristics of said first circuit board stored in said non-erasable memory
means for transmitting said first information from said gaming terminal to said remote site;
means for downloading said information only if said characteristics of said first circuit board match said first set of characteristics.

10. Apparatus, as claimed in claim 9 wherein said memory comprises read-only memory.

11. Apparatus, as claimed in claim 9 wherein said memory comprises EPROM memory.

12. Apparatus, as claimed in claim 9, wherein said non-erasable memory is one-time programmable memory.

13. Apparatus as claimed in claim 12 wherein said means for transmitting transmits all programmed portions of said one-time programmable memory.

14. Apparatus, as claimed in claim 9, wherein said information indicative of characteristics of said first circuit board includes information selected from the group consisting of

memory serial number
an identification number
date of manufacture
platform
target
vendor identification
board clock speed
processor type.

15. Apparatus, as claimed in claim 9, further comprising:

means for identifying a gaming jurisdiction location of said gaming terminal using said information indicative of characteristics of said first circuit board; and
means for downloading said programming only if said programming has been approved for said gaming jurisdiction.

16. Apparatus, as claimed in claim 9, wherein a plurality of programs is stored at said remote location and further comprising means for selecting a program for downloading to said gaming terminal, using said information indicative of characteristics of said first circuit board.

17. Apparatus, as claimed in claim 9, wherein said first circuit board is a game controller board;

18. Apparatus, as claimed in claim 9 wherein said first circuit board is a peripheral controller board.

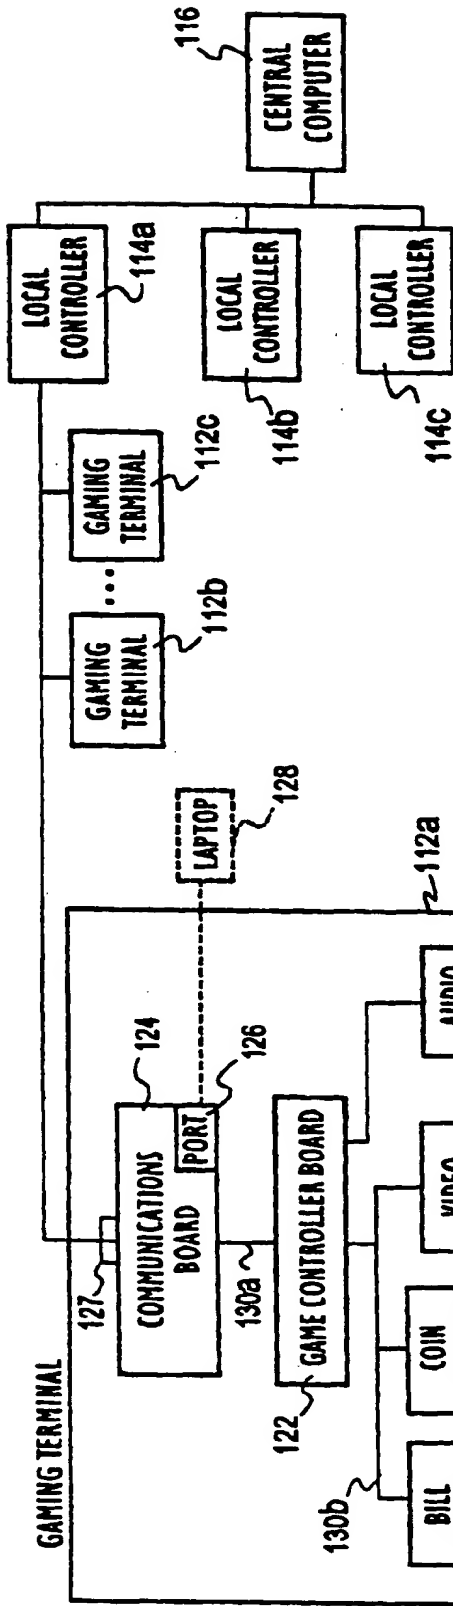


FIG. 1A

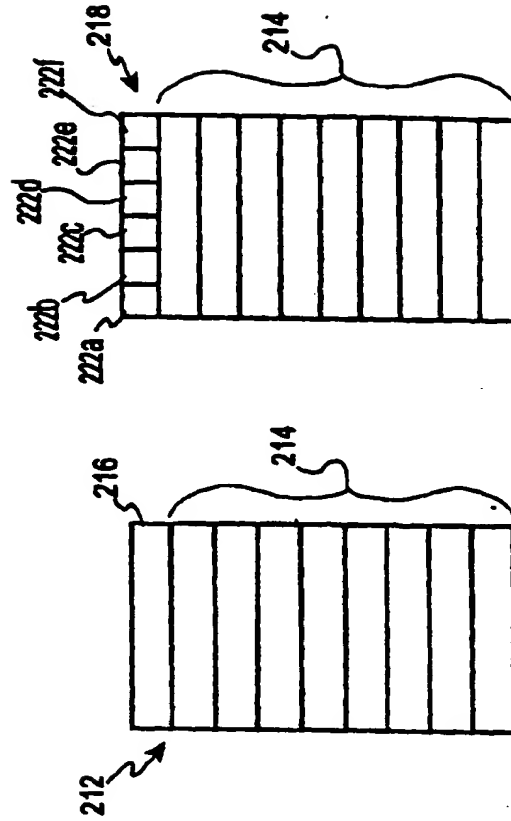


FIG. 2A

FIG. 2B

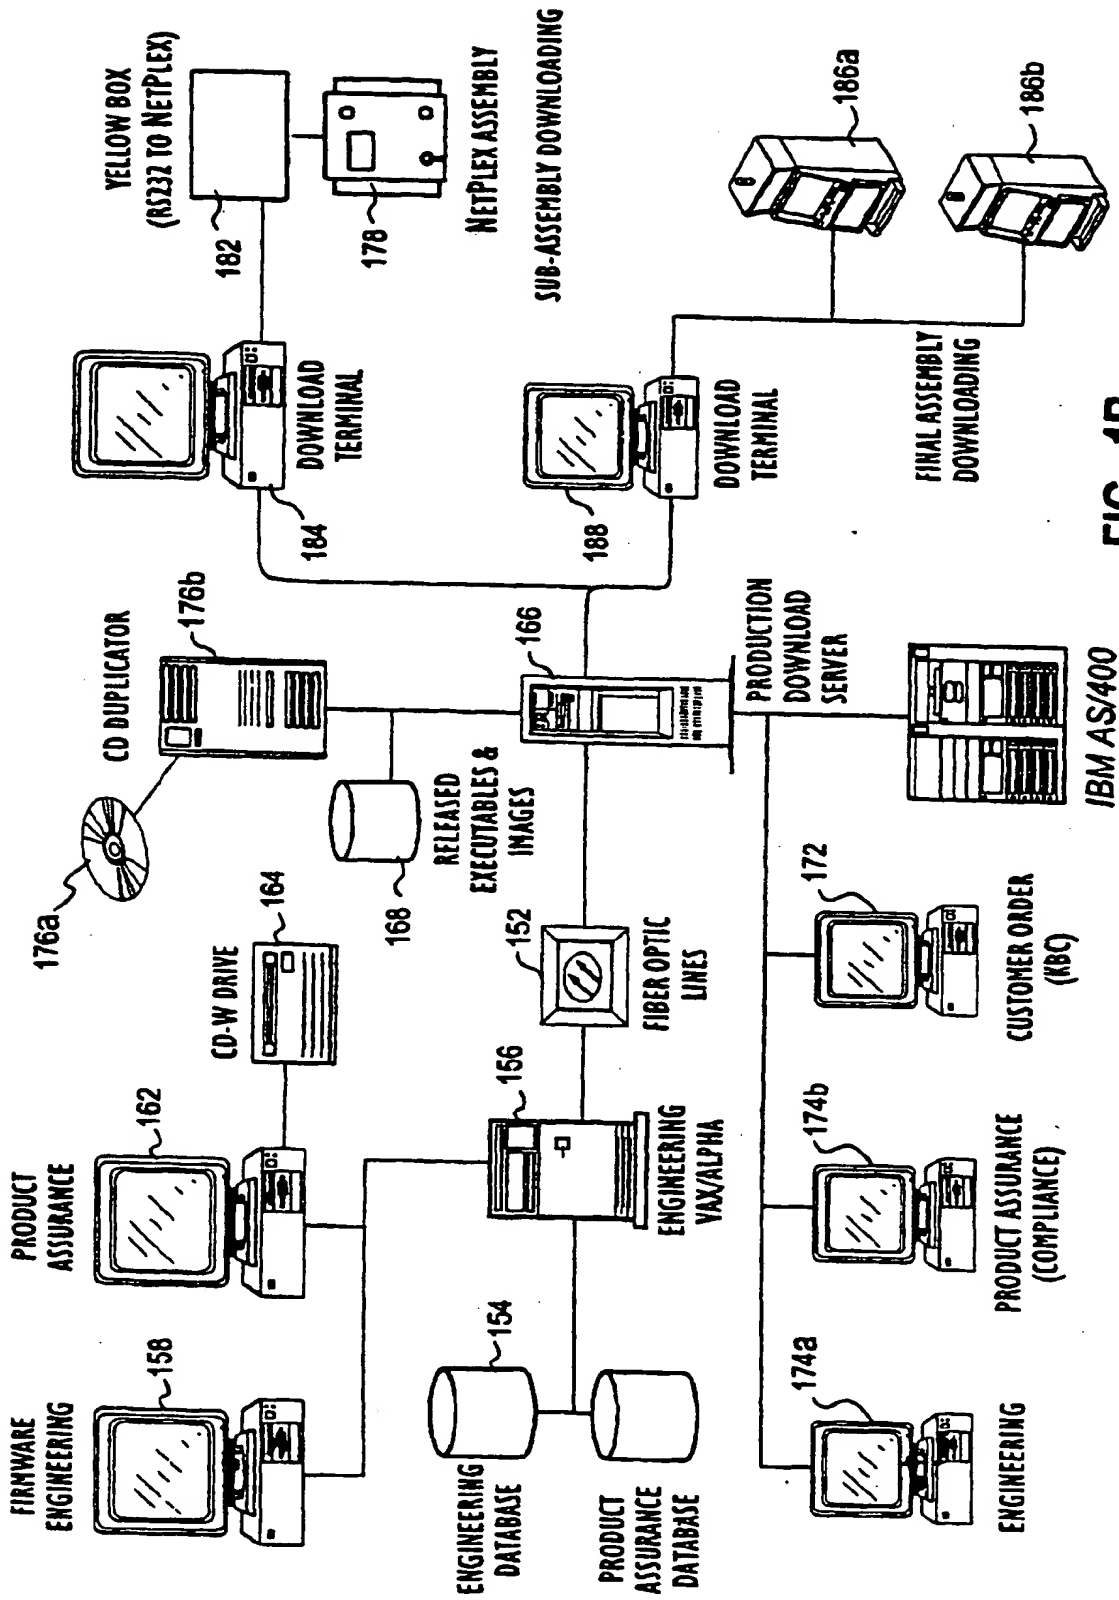


FIG. 1B